

DH(V)

单级双吸式离心泵





简介

DH(V)系列单级双吸离心泵，与其它类型的泵相比寿命长、效率高、结构合理、运行成本低、安装及维修方便。

用途

DH(V)型泵适用于输送不含固体颗粒及温度不超过130°C的清洁液体。

1. 暖通空调冷却水循环
2. 工厂、矿山、城市给排水
3. 电站、水利工程及农田灌溉
4. 消防系统，船舶工业，石化行业

GENERAL DESCRIPTION

DH(V) series split case pump is of single stage, double suction centrifugal pump. Compared with other type of pumps, it features long service life, high efficiency, advanced construction, low operation cost, friendly maintenance and service.

APPLICATION

Type DH(V) pump can be used to delivery clear liquids and should not contain solid grain at temperature below 130°C.

1. Air-condition cold water circulation.
2. Water supply and discharge in factories, mines, urban areas.
3. Water supply in power plants, water-conservancy projects as well as irrigation and drainage of farmland
4. Fire system, ship industry and chemical & oil industry.

型号说明 TYPE DESCRIPTION

DH(V) - 150 - 259 - 71 - O

"O"表示原型，即叶轮外径未经过切割，没有标注"O"表示原型叶轮经过切割
"O" means impeller not been trimmed, not marked means the original impeller has been trimmed

额定扬程
Rated head (m)


额定流量
Rated capacity (m³/h)

进口直径
Suction dia (mm)

DH单级双吸卧式离心泵
Single-stage, double-suction horizontal centrifugal pump

DV单级双吸立式离心泵
Single-stage, double-suction vertical centrifugal pump

结构简图及材质 CONSTRUCTION AND MATERIAL

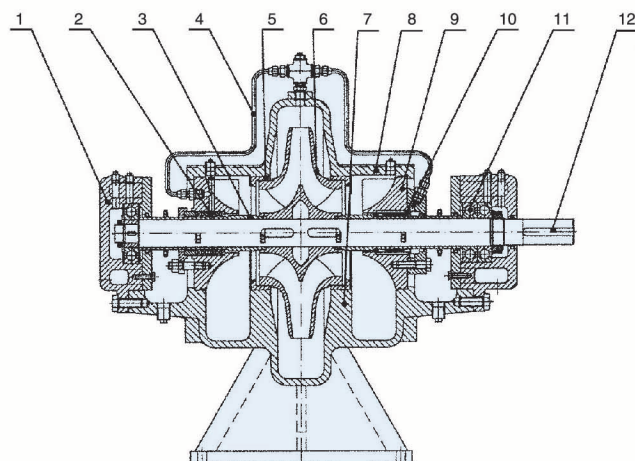

No.	名称 NAME	材质 MATERIAL
1	轴承体 BEARING UNIT	HT250/QT400-181/ZG230-450
2	填料密封 PACKING SEAL	-
3	密封轴套 SHAFT SLEEVE	45
4	密封冲洗管 FLUSH LINE	Q235
5	密封环 SEAL RING	HT250/ZCuSn5P6S2n5/ZG1Cr18Ni12Mo2Ti
6	叶轮 IMPELLER	HT250/ZCuSn10Zn2/ZCuNi16Si4/ZG1Cr18Ni12Mo2Ti
7	泵体 PUMP CASING	HT250/QT400-18/ZG230-450
8	泵盖 PUMP COVER	HT250/QT400-18/ZG230-450
9	密封体 SEALING UNIT	HT250/QT400-18/ZG230-450
10	机械密封 MECHANICAL SEAL	C/Al ₂ O ₃
11	轴承 BEARING	-
12	轴 SHAFT	45, 3Cr13



结构说明

DH(V)系列泵为单级双吸轴向中开蜗壳式离心泵，可以卧式或立式安装，卧式泵的电机可以根据需要放在泵的右端或左端。泵的吸入口和排出口均在泵轴线下方向呈水平方向。检修时只需打开泵盖，不用拆卸管路和电机，即可取出转子进行维修。

泵体

泵体的设计压力为1.6MPa和2.5MPa。为了满足世界各国的不同标准，泵的进出口法兰可按GB、ISO、DIN、ANSI及JIS等标准选取。泵的进出口法兰均在泵体上，维修时不用拆卸系统管路只需打开泵盖，即可取出转子进行维修。部分高扬程泵采用双蜗壳设计，以减小径向力，从而延长机封和轴承的使用寿命。

泵盖

采用加厚法兰，用较长预紧螺栓与泵体连接，中开面无泄漏。泵盖可以自动校正，便于安装维修。

叶轮

优秀水力设计软件设计的高效率双吸叶轮，叶轮进口面积大，进口无涡流，运转平稳，损耗低，噪声低，泵体和叶轮均可配密封环，延长叶轮的使用寿命。对叶轮进行动平衡，确保泵运行平稳，无振动。

轴

泵轴完全密封，不接触介质，无腐蚀，使用寿命长；轴径较粗，轴承间距离较短，无振动，从而增加轴的刚度，延长机械密封和轴承的使用寿命；转子部件装配时无需调整，应用碟形弹簧预应力装配，转子部件拆装方便。

轴承体

轴承体设有冷却腔，可以满足输送 $\leq 130^{\circ}\text{C}$ 的介质；卧式泵驱动端采用双列深沟球轴承，立式泵驱动端采用双列角接触轴承，承受泵的残余轴向力，保证泵运行平稳；采用油脂润滑，也可以采用封闭式的轴承，轴承设计寿命在10万小时以上。

轴封

采用软填料密封或机械密封(非平衡型)，机封不受旋转方向限制。

DESCRIPTION

DH(V) series pump is of single stage, double suction, axial split case, volute centrifugal pump. Horizontal installation or vertical installation. Motor of horizontal pump can be installed in the left or in the right. Suction and discharge are horizontally below the pump shaft centreline. When maintenance or service is needed, just open the pump cover and take out the rotation parts for essay service without dismantle of pipeline and motor.

PUMP CASING

The design pressure of pump casing is 1.6 Mpa & 2.5Mpa. In order to meet with different flange standard, suction and discharge flanges can be in conformity with GB,ISO,DIN,ANSI and JIS. Suction & discharge are all set in the casing, so it is easy to maintenance the pump: just open the pump cover, and take out the rotation parts for service without dismantle of pipeline.

PUMP COVER

Thicker flange of pump cover is fastened with pump casing by long bolts with advantages of no leakage. It is very convenient to conduct installation and maintenance work owing to the autocorrelation function of the pump cover

IMPELLER

High-efficiency double suction impeller, stable operation, low energy cost, low noise, less vibration, and long service life. The pump casing and the impeller may be equipped with sealing rings so as to extend the service life of the impeller. Keep the impeller in dynamic balance to ensure stable vibration-free operation of the pump.

SHAFT

The pump shaft is totally sealed, no contact with the pumping liquid, it features long service life and no corrosion. As its shaft diameter is large and the distance between bearings small, and there is no vibration in its operation, the rigidity of the shaft is increased, thus extending the service life of the mechanical seal and the bearing. When assembling the rotor components, no adjustment needs to be made; and it is very convenient to disassemble and assemble the rotor components with the prestressing force of the dish spring.

BEARING UNIT

There is cooling chamber in the bearing unit to ensure Max. pumping temperature 130°C . The driving end of horizontal pump adopting double zanjon ball bearing, the driving end of vertical pump adopting double row angular contact ball bearings to bear remains of axial impact. Bearings are lubricated by grease. Totally-sealed bearing is an alternative option. the service life of bearings are over 100,000 hours.


SHAFT SEAL

Soft packing seal or mechanical seal (non-balance type). No rotation direction limit of mechanical seal.



型谱图

PERFORMANCE CHART

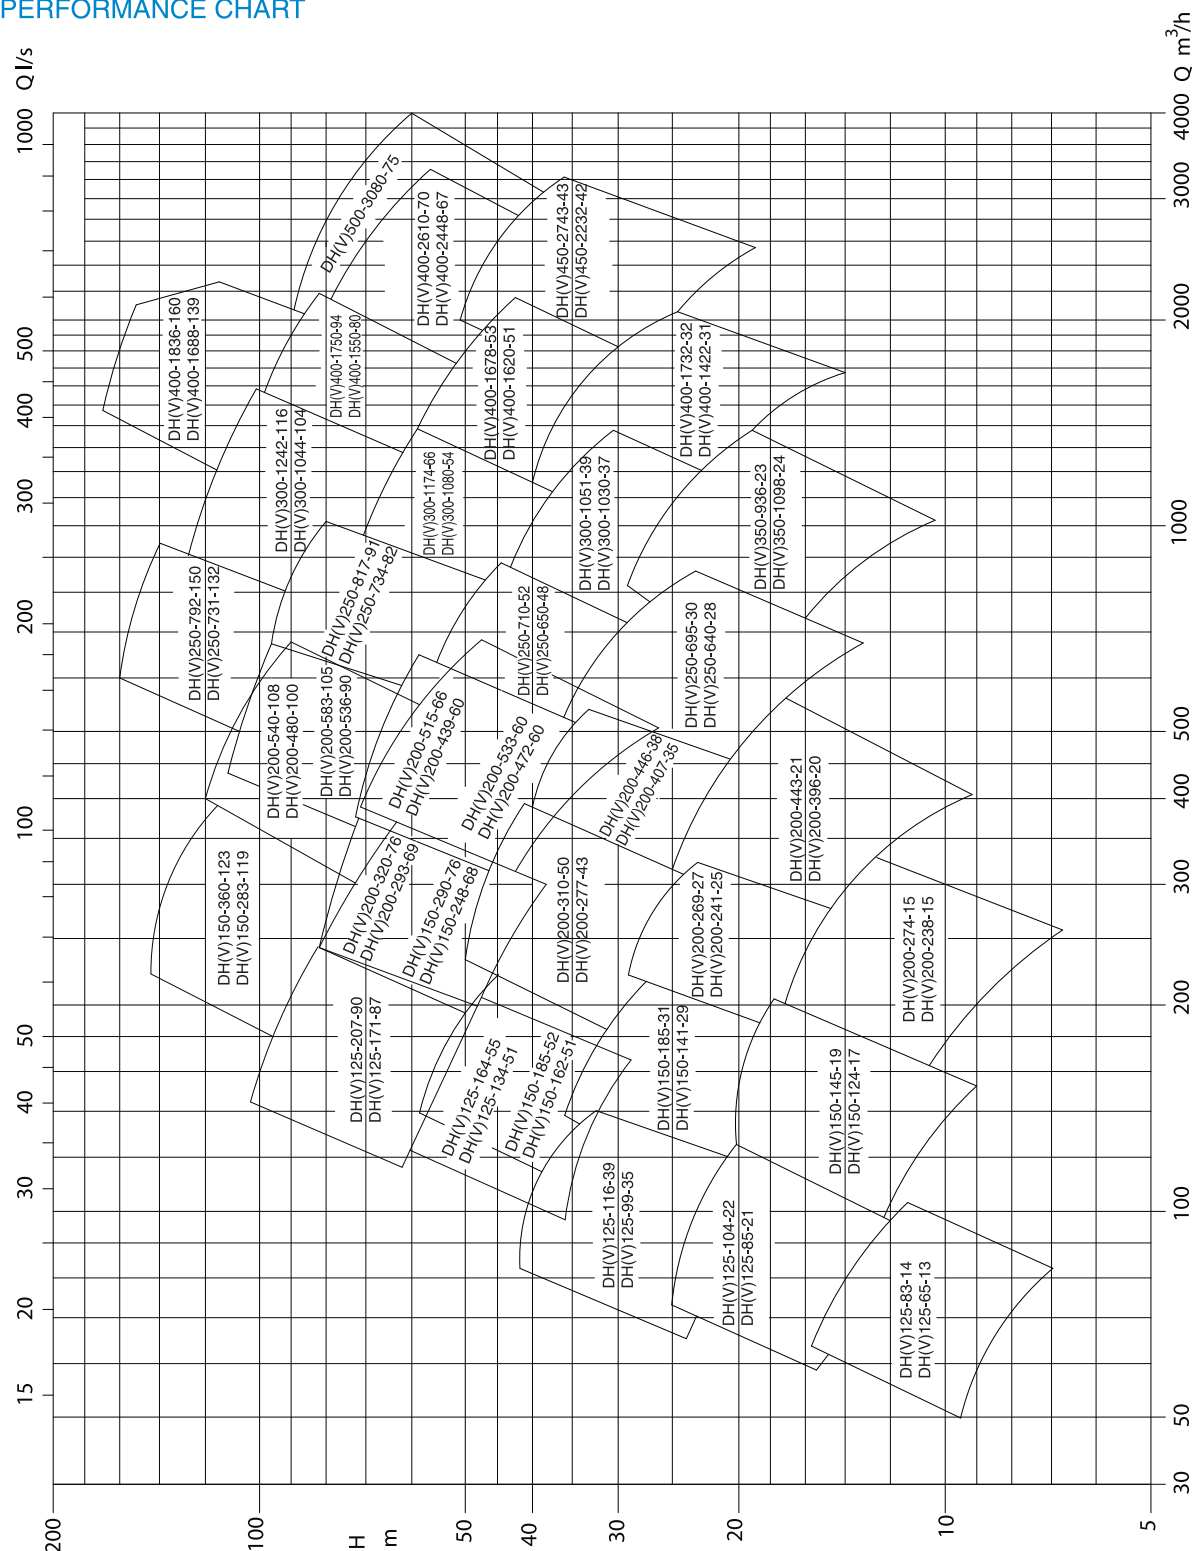


性能参数适用于密度为1kg/dm³和粘度不大于20mm²/s的介质

Data applies to a density of 1 kg/dm³ and a kinematical viscosity of up to max.20 mm²/s


安装方式 INSTALLATION TYPE

有两种安装方式——水平安装和立式安装，立式安装可以大大减少占地面积。

Two kinds of installation: Horizontal installation and vertical installation. Vertical installation can save installation space.

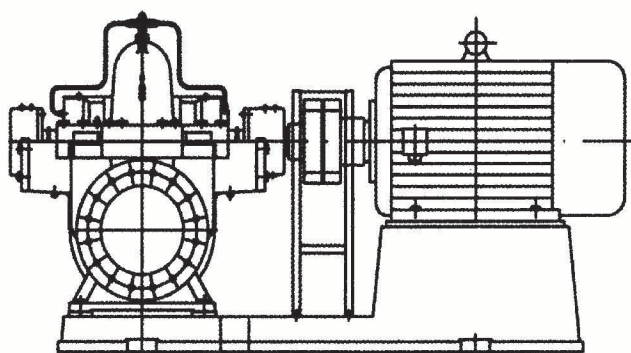

卧式 Horizontal

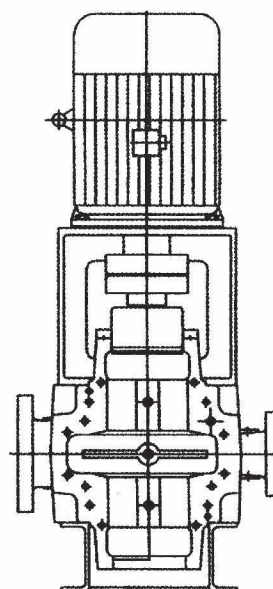

立式 Vertical



转动方向/流动方向 ROTATION DIRECTION/FLOW DIRECTION

从传动端看
逆时针方向旋转
Counter clockwise
Viewed from the
driving side


从传动端看
顺时针方向旋转
Clockwise
Viewed from the
driving side

从传动端看
逆时针方向旋转
Counter clockwise
Viewed from the
driving side

从传动端看
顺时针方向旋转
Clockwise
Viewed from the
driving side

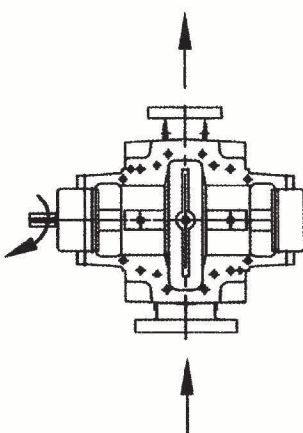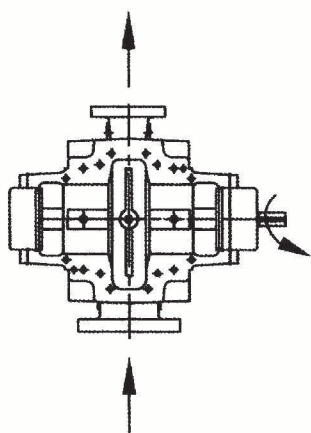

卧式(俯视图)
Horizontal(Vertical view)

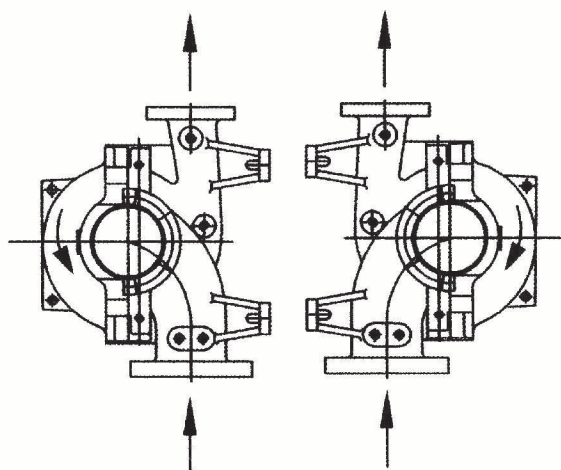

立式(俯视图)
Vertical(Vertical view)



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
DH(V)125-164-55-O	98.4 164 192	64 55 49	2950	26.4 33.2 35.8	37	65 74 71.5	5.5
-151-47	90.6 151 181.2	55.5 47.5 41	2950	20.4 26.4 28.6	30	67 74 70.6	5.5
-144-39	86.4 144 172.8	47 39 34	2950	17.0 21.2 23.2	30	65 72 69	5.3
-137-31	82.2 137 156	40 31 28	2940	13.8 16.3 18.3	22	65 71 65	5
DH(V)125-134-51-O	80.4 134 160.8	59.5 51 45	2950	19.7 25.5 27.4	30	66 73 72	5
-133-43	79.8 133 159.6	52 43.5 37	2950	16.9 21.8 23.2	30	67 72.2 69.2	5
-124-36	74.4 124 148	43.5 36 30	2930	13.3 16.9 17.3	18.5	66 72 70	5
-113-31	67.8 113 135.6	37 31 27	2930	10.5 13.2 14.2	15	65 72 70	4.5
DH(V)125-207-90-O	124.2 207 248.4	103.5 90 79	2970	54.7 66.3 70.8	75	64 76.5 75.5	7.3
-194-77	116.4 194 232.8	90 77 69	2970	41.3 52.5 60.7	75	69 77.5 72	7.2
-184-63	110.4 184 220.8	75 63.5 55	2970	32.7 41.9 45.6	55	69 76 72.5	7
-173-50	103.8 173 207.6	62 50 43.5	2950	26.1 31.4 34.1	37	67 75 72	6.9
DH(V)125-171-87-O	102.6 171 205.2	97.5 87 81	2970	40.6 51.9 59.5	75	67 78 76	7.2
-153-71	91.8 153 183.6	84.5 71.5 63.5	2970	32.7 39.7 41.6	45	64.6 75 76.3	7
-144-60	100 144 175	66.5 60 56	2950	27.9 32.4 35.6	37	65 72.5 75	6.9
-137-49	100 137 164.4	54 49 44.5	2950	22.3 25.4 27.7	30	66 72 72	6.7
DH(V)150-290-76-O	174 290 348	93 76 65	2970	58.0 72.7 75.6	90	76 82.5 81.5	8
-280-68	168 280 336	76 68 54.8	2970	47.0 64.0 63.4	75	74 81 79	7.8
-252-54	151.2 252 302	67.5 54 46	2970	38.6 46.9 49.1	55	72 79 77	7.5
-242-44	145.2 242 290.4	57 44 37.6	2970	32.2 37.4 39.4	45	70 77.5 75.5	7
DH(V)150-248-68-O	137 248 297.6	78 68 60	2970	38.3 56.3 64.8	75	76 81.5 75	7.3
-228-58	136.8 228 273.6	67 58 50	2970	33.7 45.3 48.4	55	74 79.5 77	7.2
-216-50	129.6 216 259.2	57 50 42.8	2970	27.5 37.7 40.3	45	73 78 75	7.1
-190-44	114 190 228	49.8 44 38	2950	21.8 29.9 31.9	37	71 76 74	7
DH(V)150-360-123-O	220.2 360 440.4	131 123 105	2980	106.1 150.7 163.5	200	74 80 77	6.5
-335-106	201 335 402	124 106 92	2980	91.7 121.4 130.8	160	74 79.6 77	6.3
-302-90	181.2 302 360	107 90 78	2980	71.3 93.3 99.3	110	74 79.3 77	6.1
-277-74	166.2 277 332.4	88 74 64	2970	53.8 70.6 76.2	90	74 79 76	6
DH(V)150-283-119-O	169.8 283 330	138 119 104	2980	88.0 117.5 122.9	132	72.5 78 76	6.3
-259-103	155.4 259 305	118 103 91	2980	69.3 93.6 99.4	110	72 77.6 76	6.2
-250-84	150 250 300	99 84 74	2980	56.1 74.0 80.6	90	72 77.3 75	6.1
-234-69	140.4 234 280.8	82 69 58	2970	44.1 57.1 59.9	75	71 77 74	6
DH(V)200-533-60-O	319.8 533 639.6	77 60 48	2980	88.2 101.8 100.7	132	76 83.5 83	6.9
-490-52	294 490 588	67 52 43	2980	71.5 82.6 83.9	110	75 84 82	6.8
-450-43	272.4 450 538	60 43 34	2970	60.1 65.0 68.2	75	74 81 73	6.7



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-425-40 DH(V)200-472-60-O	255	55.5	2970	52.1	75	74	6.6
	425	40		60.1		77	
	510	33		62.8		73	
	296	78	2980	83.8	110	75	6.9
	472	60.5		92.0		84.5	
-436-52	556	51	2980	94.1	90	82	6.7
	295	67.5		73.3		74	
	436	52		75.5		84	
-410-46	523.2	44	2970	77.4	75	81	6.5
	300	58		64.9		73	
	410	46		66.7		81	
-382-43	490	38	2970	68.7	75	76	6.5
	256	55.6		53.8		72	
	382	43		58.1		77	
-520 DH(V)200-540-108-O	520	32	2970	61.2	75	74	6.5
	290	131		134.3		77	
	540	108		189.0		84	
	620	105	2980	217.4	220	81.5	9.2
	300	111		120.9		75	
-490-88	490	88	2980	143.1	160	82	9.1
	588	75		152.0		79	
	270	95		95.7		73	
-450-75	450	75	2980	114.8	132	80	9.1
	540	63		118.7		78	
	270	74		76.6		71	
-400-61 DH(V)200-480-100-O	400	61	2980	85.2	110	78	9
	480	53		91.1		76	
	330	120		143.7		75	
	480	100	2980	166.5	185	78.5	9.5
	576	86		177.4		76	
-440-88	315	100	2980	111.4	160	77	9.5
	440	88		133.1		79.2	
	540	73		143.1		75	
-420-70	300	83	2980	88.6	110	76.5	9.2
	420	70		101.3		79	
	485	59		102.5		76	
-350-62	240	72	2970	65.3	90	72	9
	350	62		75.7		78	
	420	53		79.7		76	
-49.8 DH(V)125-83-14-O	49.8	16	1440	2.9	5.5	76	3.2
	83	13.8		3.8		82	
	99.6	12.2		4.1		80.5	
-76-12	45.6	13.8	1440	2.3	4	74	3.2
	76	11.8		3.0		81	
	91.2	10.4		3.3		79	
-72-10	43.2	11.7	1430	1.9	3	72	3
	72	9.8		2.4		80.5	
	86.4	8.6		2.6		78	
-69-8	41.4	9.9	1430	1.5	3	72	3
	69	8.2		2.0		78	
	82.8	6.8		2.1		74	
-40 DH(V)125-65-13-O	40	13.5	1440	2.0	4	72	3
	65	12.8		2.8		81	
	78	11.5		3.1		80	
-64-11	40	13	1430	2.0	3	72	3
	64	10.8		2.4		80	
	76.8	9.7		2.6		79	
-36.3 DH(V)125-104-22-O	36.3	10.8	1430	1.5	3	70	3
	61	9		1.9		78	
	73.2	7.7		2.0		76	
-58-8	34.8	9.2	1430	1.2	2.2	70	3
	58	7.6		1.6		74	
	69.6	6.4		1.7		72	
-62.4 DH(V)125-104-22-O	62.4	26	1460	6.0	11	74	3
	104	22.5		8.1		78.5	
	124.8	20		8.9		76	
-59.4 DH(V)125-104-22-O	59.4	22	1460	4.9	11	72	2.7
	99	19		6.6		78	
	118.8	17		7.3		75	
-54 DH(V)125-85-21-O	54	18.5	1440	3.9	7.5	70	2.4
	90	16		5.2		76	
	108	14		5.6		74	
-50.4 DH(V)125-85-21-O	50.4	15.5	1440	3.0	5.5	70	2.3
	84	13		4.0		75	
	100.8	11		4.1		73	
-51 DH(V)125-85-21-O	51	24.5	1460	4.7	11	72	3.1
	85	20.7		6.2		77	
	102	18		6.7		75	
-46.2 DH(V)125-116-39-O	46.2	21	1440	3.8	7.5	70	2.9
	77	18.1		5.0		76	
	92.4	15.5		5.2		74.5	
-43.2 DH(V)125-116-39-O	43.2	18	1440	3.1	5.5	68	2.8
	72	15		3.9		75	
	86.4	13		4.2		73	
-40.2 DH(V)125-116-39-O	40.2	14.5	1440	2.4	4	66	2.5
	67	12.5		3.1		74	
	80.4	10.5		3.2		72	
-67.8 DH(V)125-116-39-O	67.8	42.5	1470	12.5	22	63	3.8
	116	38.8		18.0		68	
	135.6	33.5		19.9		62	
-59.4 DH(V)125-99-35-O	59.4	36.5	1460	9.2	15	64	3.6
	99	33		13.2		67.5	
	118.8	29		14.4		65	
-52.8 DH(V)125-99-35-O	52.8	30.5	1460	7.4	15	59	3.5
	88	27.5		10.6		62.3	
	105.6	24.5		11.9		59	
-60 DH(V)125-99-35-O	60	25	1460	6.8	11	60	3.1
	81	22.5		8.1		61	
	104	17		8.3		58	
-59.4 DH(V)125-99-35-O	59.4	41	1470	9.9	18.5	67	3
	99	35.5		13.1		73	
	118.8	31		14.1		71	
-54 DH(V)125-99-35-O	54	35.5	1460	8.0	15	65	3
	90	30.8		10.8		70	
	108	26.5		11.5		68	



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-76-25	45.6 76 91.2	29 25.5 22.5	1460	5.8 8.0 8.6	11	62 66 66	2.5
-67-20	40.2 67 80.4	23 20 17.5	1440	4.2 5.7 6.2	7.5	60 64 62	2.5
DH(V)150-145-19-O	87 145 174	21 19 14	1460	6.5 8.1 8.1	15	76 82.5 81.5	5
-140-16	84 140 168	18.3 16 13.7	1460	5.7 7.5 7.9	11	74 81 79	5
-126-13	75.6 126 151	16 13.5 12	1440	4.6 5.9 6.4	7.5	72 79 77	4.5
-121-11	72.6 121 145.2	13.5 11 9.4	1440	3.8 4.7 5.0	7.5	70 77.5 74	4.5
DH(V)150-124-17-O	74.4 124 148.8	20.3 17 16.4	1460	5.4 7.0 8.4	11	76 81.5 79	3
-114-14	68.4 114 136.8	17.5 14.5 12.5	1440	4.4 5.7 6.0	7.5	74 79.5 77	3
-108-12	64.8 108 129.6	15 12.5 10.7	1440	3.6 4.7 5.0	7.5	73 78 75	3
-95-11	57 95 114	13 11 9.3	1440	2.8 3.7 3.9	5.5	71 76 74	3
DH(V)150-185-31-O	105 185 210	35 31 29	1470	13.5 19.3 21.1	22	74.2 81 78.5	2.9
-166-27	99.6 166 190	31.5 27 25.6	1470	11.5 15.3 17.2	18.5	74 79.6 77	2.8
-152-22	91.2 152 186.8	26.3 22.5 20.7	1460	8.9 11.7 13.5	15	73.5 79.3 77.7	2.6
-141-18	84.6 141 169.2	21 18.5 16	1460	6.6 9.2 9.7	11	73.5 77.5 76	2.5
DH(V)150-141-29-O	103 141 185	30.8 29 26	1470	11.8 13.9 16.6	18.5	73 80 79	2.5
-134-25	80.4 134 160.8	29.5 25.5 24.5	1460	8.9 12.0 13.9	15	72.5 77.6 77	2.3
-125-21	78 125 140	23 21 20.5	1460	6.8 9.2 10.3	11	72 77.3 76.2	2.2
-118-17	77 118 145	18.5 17 15	1460	5.4 7.1 8.0	11	72 77 74	2.2
DH(V)150-185-52-O	111 185 222	55 52 45	1480	25.2 35.9 38.3	45	66 73 71	4.1
-167-44	100.2 167 200.4	47 44 37.5	1480	20.0 27.8 29.2	37	64 72 70	3.8
-155-38	93 155 186	41 38 32	1470	16.5 22.6 23.5	30	63 71 69	3.6
-135-30	81 135 162	34 30.3 26	1470	12.1 16.1 16.7	22	62 69 68.5	3.4
DH(V)150-162-52-O	97.2 162 194.4	55 52 46.3	1480	22.7 31.9 36.0	45	64 72 68	4.6
-142-44	85.2 142 170.4	46 44 39	1470	17.5 24.6 27.0	30	61 69 67	4.5
-131-37	78.6 131 157.2	39 37.5 33	1470	13.9 20.1 22.1	30	60 66.5 64	4.3
-115-29	69 115 138	32.5 28.7 25	1470	10.2 14.3 15.3	18.5	60 63 61.5	4
DH(V)200-274-15-O	164.4 274 328.8	18.7 14.8 12	1470	10.9 12.9 13.1	18.5	77 85.5 82	2.3
-241-13	144.6 241 289.2	16.4 13.2 10.8	1460	8.8 10.2 10.4	15	73 84.5 82	2.2
-230-11	138 230 276	14 10.6 8.4	1460	7.3 8.0 8.1	11	72 82.5 78	2.2
-209-9	125.4 209 250.8	11.6 8.7 6.8	1460	5.7 6.4 6.4	11	70 77.5 73	2
DH(V)200-238-15-O	142.8 238 285.6	19 15.1 12.6	1460	9.8 11.6 11.9	15	75 84.5 82	2.3
-212-13	127.2 212 254.4	16.8 13.5 11.6	1460	8.1 9.3 9.8	11	72 84 82	2.2
-205-11	123 205 246	14.2 11.5 9.3	1460	6.6 7.8 8.0	11	72 82 78	2.2
-195-9	117 195 234	11.8 9.1 7.2	1460	5.3 6.2 6.4	11	71 78 72	2
DH(V)200-269-27-O	161.4 269 322.8	31.5 27 23.5	1470	18.3 23.5 25.2	30	75.5 84 82	3.7



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-243-22	145.8 243 291.6	25 21 19	1470	13.4 17.7 18.9	22	74 82 80	3.7
-223-18	133.8 223 267.6	22 18 15.5	1470	11.1 13.7 14.4	18.5	72 80 78.5	3.5
-202-14	121.2 202 242.4	18 14.2 12	1460	8.5 10.0 10.6	15	70 78 75	3.3
DH(V)200-241-25-O	144.6 241 289.2	28 25 21.5	1470	14.5 19.3 21.2	30	76 83 80	8
-218-21	130.8 218 261.6	25.2 21 17.5	1470	12.1 15.2 15.8	18.5	74 82 79	8
-196-17	117.6 196 235.2	20 17.5 14.5	1460	8.9 11.8 11.9	15	72 79 78	7.5
-173-14	103.8 173 207.6	17 13.7 11.5	1460	6.9 8.5 8.8	11	70 76 74	7.5
DH(V)200-310-50-O	186 310 372	54 50 46	1480	38.0 52.7 59.7	75	72 80 78	2.9
-281-42	168.6 281 337.2	45 42 36	1480	28.7 40.7 42.9	55	72 79 77	2.7
-256-31	153.6 256 307.2	35 31.5 28	1480	20.9 28.1 30.8	37	70 78 76	2.6
-230-26	138 230 276	29 26 24	1470	16.0 21.4 25.0	30	68 76 72	2.4
DH(V)200-277-43-O	166.2 277 332.4	48 43 38.5	1480	30.0 41.0 45.0	55	72.5 79 77.5	2.6
-252-37	151.2 252 302.4	42 37 33	1480	24.3 32.5 35.3	45	71 78 77	2.5
-227-30	136.2 227 272.4	34.5 30.5 27	1470	18.3 24.5 26.7	30	70 77 75	2.5
-198-24	118.8 198 237.6	27.5 24.5 22	1470	13.1 17.4 19.2	22	68 76 74	2.4
DH(V)200-328-76-O	196.8 328 393.6	87 76 60	1480	63.0 84.8 82.4	110	74 80 78	2.3
-292-66	175.2 292 350.4	73 66.5 56	1480	48.4 67.3 69.8	90	72 78.5 76.5	3.3
-256-56	153.6 256 307.2	62 56 46	1480	37.0 50.7 50.6	75	70 77 76	3.1
-230-47	138 230 276	52.5 47 37	1480	29.0 38.7 37.6	55	68 76 74	2.8
DH(V)200-293-69-O	175.8 293 351.6	81 69.5 64	1480	53.1 70.2 79.6	110	73 79 77	4.6
-272-60	163.2 272 326.4	73 60.5 54.5	1480	44.7 57.4 63.7	75	72.5 78 76	4.3
-227-53	136.2 227 272.4	59 53 43	1480	30.8 42.5 42.5	55	71 77 75	4.1
-202-45	121.2 202 242.4	52 45 40	1480	25.2 32.6 36.2	45	68 76 73	3.9
DH(V)200-443-21-O	265.8 443 531.6	27 21 15.3	1480	25.0 29.1 26.4	37	78 87 84	3.7
-403-18	241.8 403 483.6	23 18 14	1470	20.5 23.0 22.5	30	74 86 82	3.6
-378-15	226.8 378 453.6	19 15 12.5	1470	16.3 18.4 19.3	22	72 84 80	3.4
-349-11	209.4 349 418.8	16 11.5 8.5	1470	13.0 14.2 13.1	18.5	70 77 74	3.4
DH(V)200-396-20-O	237.6 396 475.2	25.5 20.4 17	1480	21.7 25.6 26.5	30	76 86 83	3.8
-378-17	226.8 378 453.6	22.5 17 12	1470	18.8 20.6 18.1	30	74 85 82	3.6
-353-14	211.8 353 423.6	19.5 14.5 9	1470	15.6 16.6 12.8	22	72 84 81	3.4
-331-11	198.6 331 397.2	16 11.5 9	1470	12.4 14.0 13.0	18.5	70 80 75	3.2
DH(V)200-446-38-O	267.6 446 535.2	44 38 33.5	1480	42.2 54.3 59.2	75	76 86 82.5	4.3
-403-31	241.8 403 483.6	37 31 27	1480	32.9 41.0 43.9	55	74 83 81	4
-371-25	222.6 371 445.2	30 25 21.5	1480	25.2 31.2 32.6	37	72 81 80	3.6
-331-20	198.6 331 397.2	26 20 17	1470	20.1 23.1 23.9	30	70 78 77	3.4



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
DH(V)200-407-35-O	244.2	42.5	1480	37.2	55	76	4.9
	407	35		46.2		84	
	488.4	30		49.2		81	
-367-29	220.2	36	1480	29.2	45	74	4.7
	367	29.5		35.2		82	
	440.4	25		37.5		80	
-335-25	201	30	1480	22.8	37	72	4.5
	335	25		28.8		80	
	402	21		29.5		78	
-292-20	175.2	25	1470	17.0	30	70	4.3
	292	20.5		20.9		78	
	350.4	17.5		22.0		76	
DH(V)200-515-66-O	309	76	1480	86.4	132	74	4.8
	515	66		112.8		82	
	618	59		124.1		80	
-472-54	283.2	62	1480	65.5	110	73	4.6
	472	54.5		86.5		81	
	566.4	48		94.9		78	
-432-43	259.2	50.5	1480	49.5	75	72	4.6
	432	43.5		63.9		80	
	518.4	37		68.7		76	
-396-35	237.6	41	1480	37.9	55	70	4.5
	396	35		48.1		78.5	
	475.2	28		50.3		72	
DH(V)200-439-60-O	263.4	68	1480	65.9	110	74	3.4
	439	60		88.5		81	
	526.8	54		98.0		79	
-403-50	241.8	57	1480	52.1	90	72	3.3
	403	50		68.1		80.5	
	483.6	44		74.3		78	
-375-40	225	46	1480	40.3	75	70	3.1
	375	40		51.0		80	
	450	34.5		57.1		74	
-324-33	194.4	37.5	1480	28.4	45	70	3.1
	324	33		37.3		78	
	388.8	28		40.0		74	
DH(V)200-583-105-O	349.8	123	1480	162.7	280	72	4.3
	583	105		208.3		80	
	699.6	93		227.1		78	
-550-88	330	107	1480	133.5	220	72	4.2
	550	88.5		167.7		79	
	660	78		184.4		76	
-515-75	309	87	1480	103.1	200	71	4.1
	515	75		134.8		78	
	618	67		150.3		75	
-472-61	283.2	73	1480	80.4	132	70	4
	472	61.5		102.6		77	
	566.4	53		111.9		73	
DH(V)200-536-90-O	321.6	105	1480	125.9	220	73	4
	536	90		166.2		79	
	643.2	78		182.1		75	
-490-78	294	92	1480	102.3	200	72	3.8
	490	78		133.4		78	
	588	69		149.3		74	
-446-68	267.6	79	1480	81.1	160	71	3.7
	446	68.5		108.0		77	
	535.2	61		120.1		74	
-403-57	241.8	67	1480	63.0	110	70	3.6
	403	57.5		83.0		76	
	483.6	51		93.2		72	
DH(V)250-695-30-O	417	37.5	1480	55.3	75	77	4
	695	30		65.2		87	
	834	25		67.2		84.5	
-648-25	388.8	32	1480	44.6	75	76	3.9
	648	25.5		52.3		86	
	777.6	20		52.3		81	
-600-22	360	26	1480	35.4	55	72	3.8
	600	22		42.8		84	
	720	17		42.2		79	
-550-17	330	23	1480	29.5	37	70	3.8
	550	17		32.2		79	
	660	13.5		31.9		76	
DH(V)250-640-28-O	384	35	1480	46.9	75	78	4
	640	28		56.7		86	
	768	23		57.2		84	
-595-24	357	31	1480	39.6	55	76	3.9
	595	24.5		46.7		85	
	714	20		47.4		82	
-560-21	336	27	1480	33.4	45	74	3.8
	560	21		38.1		84	
	672	16.5		37.7		80	
-515-17	309	22	1480	25.7	37	72	3.7
	515	17		29.1		82	
	618	13.5		29.1		78	
DH(V)250-710-52-O	426	60	1480	89.2	160	78	4.9
	710	52		116.9		86	
	852	45		125.7		83	
-630-42	378	50.5	1480	68.4	110	76	4.7
	630	42.5		86.8		84	
	756	37.5		95.3		81	
-570-35	342	43	1480	54.1	90	74	4.6
	570	35.5		66.4		83	
	684	30		69.8		80	
-510-28	306	36	1480	41.7	75	72	4.4
	510	28.5		48.8		81	
	612	24		50.6		79	
DH(V)250-650-48-O	390	57	1480	77.6	132	78	4
	650	48		99.9		85	
	780	41		104.9		83	
-585-40	351	48	1480	60.3	90	76	3.9
	585	40.5		76.8		84	
	702	34		80.2		81	
-530-34	318	41	1480	48.0	75	74	3.8
	530	34.5		60.7		82	
	636	28		61.4		79	



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-470-28	282	34	1480	36.3	55	72	3.7
	470	28		45.9		78	
	564	24		47.9		77	
	490	101		180.6		74.6	
DH(V)250-817-91-O	817	91	1480	243.8	315	83	7.8
	980	83		283.8		78	
	454	86		143.1		74.3	
	756	76.5		192.0		82	
-756-76	907	67	1480	217.4	250	76.1	7.5
	423	72		111.9		74.1	
	706	62.5		150.1		80	
	847	55		168.0		75.5	
-706-62	389	56	1480	83.1	185	71.4	7.4
	648	47.5		106.7		78.5	
	778	42		121.0		73.5	
	441	94		153.1		73.7	
DH(V)250-734-82-O	734	81.7	1480	199.1	250	82	4.4
	881	73		229.8		76.2	
	417	80		126.0		72.1	
	695	68		158.8		81	
-695-68	834	62	1480	185.2	200	76	4.2
	393	64.5		98.6		70	
	655	55		122.6		80	
	786	47		134.6		74.7	
-655-55	359	52	1480	73.4	160	69.2	4
	598	43.5		90.8		78	
	717	37		99.9		72.3	
	475	161.5		290.0		72	
DH(V)250-792-150-O	792	150	1480	404.3	560	80	8.2
	950	137		471.1		75.2	
	570	138		299.5		71.5	
	800	125		346.8		78.5	
-800-125	894	115	1480	373.7	450	74.9	8.1
	522	115.5		230.8		71.1	
	731	104.5		270.1		77	
	820	98		302.2		72.4	
-731-104	391	100	1480	148.2	280	71.8	7.7
	653	88		205.8		76	
	792	78		233.6		72	
	478	145		259.9		72.6	
DH(V)250-731-132-O	731	132	1480	332.5	450	79	8.2
	880	121.5		383.5		75.9	
	447	126		212.7		72.1	
	718	112		278.9		78.5	
-718-112	795	102	1480	299.1	355	73.8	8
	435	104.5		174.3		71	
	591	99		204.2		78	
	850	82.5		264.8		72.1	
-591-99	341	93	1480	124.4	250	69.4	7.7
	569	83		167.0		77	
	683	72		189.6		70.6	
	631	47.5		105.6		77.3	
DH(V)300-1051-39-O	1051	39	1480	126.8	160	88	4.9
	1261	33		138.8		81.6	
	596	41		87.5		76	
	994	33		103.8		86	
-994-33	1192	27.5	1480	110.2	132	81	4.6
	566	35		78.8		68.4	
	943	27		83.5		83	
	1132	22		85.9		78.9	
-943-27	523	27.5	1480	64.0	90	61.2	4.5
	871	20		61.2		77.5	
	1045	13.8		56.0		70.1	
	618	46		102.0		75.9	
DH(V)300-1030-37-O	1030	37	1480	119.2	132	87	4.7
	1236	31		129.7		80.4	
	581	41		86.5		75	
	968	32		98.1		86	
-968-32	1162	26	1480	102.8	110	80	4.6
	549	35		74.6		70.1	
	914	27		80.0		84	
	1097	22		83.0		79.2	
-914-27	510	30	1480	63.0	75	66.1	4.4
	850	22		62.1		82	
	1020	16		62.0		71.6	
	704	77		184.9		79.8	
DH(V)300-1174-66-O	1174	66	1480	242.4	280	87	5.6
	1408	57		260.1		84	
	648	65		152.9		75	
	1080	55		190.2		85	
-1080-55	1296	47	1480	204.0	250	81.3	5.4
	601	54		122.7		72	
	1001	45.5		149.4		83	
	1201	37		160.0		75.6	
-1001-45	557	46	1480	102.9	132	67.8	5.1
	929	37.5		118.5		80	
	1115	32		129.5		75	
	648	68		152.0		78.9	
DH(V)300-1080-54-O	1080	54.5	1480	190.8	250	84	4.6
	1296	45		199.9		79.4	
	584	57		124.6		72.7	
	976	47		151.4		82.5	
-976-47	1171	39	1480	158.0	200	75.7	4.5
	531	50		99.8		72.4	
	886	40.5		121.3		80.5	
	1063	34		126.1		78	
-886-40	482	43	1480	80.0	132	70.5	4.5
	803	34.5		96.1		78.5	
	963	28		99.9		73.5	
	745	132		339.7		78.8	
DH(V)300-1242-116-O	1242	116	1480	466.9	560	84	7.5
	1490	103		505.2		82.7	
	700	118		287.2		78.3	
	1166	100		380.1		83.5	
-1166-100	1400	87	1480	419.7	450	79	7.5



性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-1084-83	650 1084 1300	100 83 71	1480	232.8 235.1 320.1	355	76 83 78.5	7
-1001-66	601 1001 1201	80.5 66 57	1480	175.1 218.0 238.9	250	75.2 82.5 78	7
DH(V)300-1044-104-O	626 1044 1253	120 104 91	1480	272.7 356.1 389.9	450	75 83 79.6	7
-965-90	579 965 1158	104 90 80	1480	221.5 286.6 319.2	355	74 82.5 79	7
-875-74	525 875 1050	87 74.5 65	1480	169.2 217.7 237.3	250	73.5 81.5 78.3	6.8
-799-62	480 799 959	72 62 56	1480	128.9 167.5 193.9	200	73 80.5 75.4	6.7
DH(V)350-1098-24-O	659 1098 1318	33 24.5 20	1480	79.0 85.2 88.0	110	74.9 86 81.5	5.8
-1044-20	626 1044 1253	27 19.8 15	1480	62.9 66.6 63.0	75	73.1 84.5 81.2	5.8
-1008-15	605 1008 1210	22.5 15.5 11	1480	54.0 51.9 47.7	75	68.6 82 76	5.7
-965-11	579 965 1158	17.5 11.5 8	1480	42.4 37.8 34.1	55	65 80 74	5.6
DH(V)350-936-23-O	562 936 1054	29 23 19	1480	61.0 68.9 74.7	90	72.7 85 73	5.5
-864-20	518 864 1037	26 20 14	1480	51.9 56.0 49.0	75	70.6 84 80.6	5.5
-799-17	480 799 959	22.5 16.7 13	1480	45.0 44.8 44.0	55	65.3 81 77.2	5.2
-700-14	420 700 840	19 13.7 12.5	1480	38.1 33.9 40.8	45	57 77 70	5
DH(V)400-1678-53-O	1007 1678 2013	64 53 46	1480	234.9 275.1 299.0	315	74.7 88 84.3	6.6
-1577-45	946 1577 1892	56 45 37	1480	200.0 223.3 231.0	250	72.1 86.5 82.5	6.5
-1476-36	886 1476 1771	47 36.5 28	1480	161.0 174.6 174.9	200	70.4 84 77.2	6.3
-1361-27	817 1361 1633	37 27.5 21	1480	134.0 129.0 125.0	160	61.4 79 74.7	6.2
DH(V)400-1620-51-O	972 1620 1944	64 51.5 43	1480	216.8 259.6 269.9	315	78.1 87.5 84.3	6.5
-1519-45	912 1519 1823	56 45 36	1480	180.1 215.1 220.8	250	77.2 86.5 80.9	6.2
-1422-37	853 1422 1706	47 37.5 30	1480	152.0 172.8 178.8	200	71.8 84 77.9	6
-1332-30	799 1332 1598	39 30.5 24	1480	125.9 135.7 139.9	160	67.4 81.5 74.6	6
DH(V)400-1750-94-O	1050 1750 2100	107 94 84	1480	382.3 520.7 568.3	630	80 86 84.5	7
-1650-76	990 1650 1980	89 76 67	1480	307.5 399.3 435.1	500	78 85.5 83	7
-1570-62	942 1570 1884	74 62 55	1480	249.7 311.7 346.1	400	76 85 81.5	6.8
-1510-50	906 1510 1812	62 50 43	1480	206.6 246.1 265.1	315	74 83.5 80	6.5
DH(V)400-1550-80-O	930 1550 1860	95 80 75	1480	304.4 399.5 460.3	500	79 84.5 82.5	6.8
-1450-67	870 1450 1740	81 67 57	1480	249.1 316.7 333.3	400	77 83.5 81	6.5
-1360-57	816 1360 1632	70 57 50	1480	207.3 254.2 277.7	315	75 83 80	6.5
-1280-47	768 1280 1536	59 47.5 41	1480	171.3 201.8 217.0	250	72 82 79	6.2
DH(V)400-1836-160-O	1102 1836 2070	180 160 151	1480	670.0 940.8 1025.2	1120	80.6 85 83	7.5
-1735-136	1041 1735 2082	152 136 124	1480	538.4 759.3 909.2	1000	80 84.6 77.3	7.4
-1624-112	974 1624 1948	130 112 99	1480	430.9 567.4 681.8	710	80 84.3 77	7.3
-1537-91	922 1537 1845	107 91 80	1480	344.3 453.3 521.8	630	78 84 77	7.2
DH(V)400-1688-139-O	1013 1688 2026	165 139 119	1480	603.5 764.9 820.4	1000	75.4 83.5 80	6.4




性能参数 PERFORMANCE PARAMETERS

型号 TYPE	流量 CAPACITY (m³/h)	扬程 HEAD (m)	转速 SPEED (r/min)	功率 POWER		效率 EFF (%)	必须气蚀余量 NPSHr (m)
				轴功率 SHAFT POWER	电机功率 MOTOR POWER		
-1573-119	944 1573 1888	142 119 106	1480	493.1 613.9 689.6	800	74 83 79	6.2
-1451-99	871 1451 1741	117 99 87	1480	380.0 474.0 528.6	630	73 82.5 78	6.2
-1343-81	806 1343 1611	97 81 67	1480	293.6 361.1 384.1	450	72.5 82 76.5	6.1
DH(V)400-1732-32-O	1039 1732 2078	42 32 24	1480	168.0 174.4 175.0	200	70.7 86.5 77.6	7.2
-1692-26	1015 1692 2030	36 26.5 19	1480	142.9 143.6 140.9	160	69.6 85 74.5	7.1
-1642-21	1050 1642 1886	30.5 21 15.5	1480	123.7 113.1 107.5	132	70.5 83 74	7
-1420-19	961 1420 1720	24.5 19 12	1480	91.6 90.7 79.1	110	70 81 71	6.9
DH(V)400-1422-31-O	853 1422 1526	36 31 19.5	1480	115.3 142.9 112.8	160	72.5 84 71.8	6.3
-1336-26	801 1336 1603	34 26.3 21	1480	104.1 113.9 113.0	132	71.2 84 81.1	6.3
-1271-22	763 1271 1525	29 22.5 18	1480	88.1 94.9 92.7	110	68.4 82 80.6	6.7
-1188-18	713 1188 1426	24.5 17.8 13	1480	75.0 73.8 70.0	90	63.4 78 72.1	6.7
DH(V)450-2743-43-O	1646 2743 3292	54.6 43.5 35	1480	326.2 371.2 427.3	450	75 87.5 73.4	9.5
-2635-35	1581 2635 3162	46.2 35 27.6	1480	258.2 293.6 337.9	355	77 85.5 70.3	9.5
-2563-27	1538 2563 3076	37.8 27.5 21	1480	201.1 228.4 262.5	280	78.7 84 67	9
-2484-21	1490 2484 2981	30.7 21.5 16.3	1480	158.0 179.5 206.7	220	78.8 81 64	9
DH(V)450-2232-42-O	1339 2232 2678	53.4 42 34.2	1480	263.0 295.0 343.4	400	74 86.5 72.6	9
-2088-36	1253 2088 2505.5	47.3 36 28.3	1480	213.4 242.2 278.5	315	75.6 84.5 69.3	9
-1987-30	1192 1987 2384.5	39 30 22.6	1480	174.1 197.9 227.4	250	72.7 82 64.5	8.8
-1858-25	1114.5 1858 2229	33.2 25 20	1480	141.9 161.1 185.3	200	71 78.5 65.5	8.8
DH(V)400-2610-70-O	1566 2610 3132	85 70 60	1480	467.0 562.0 600.4	630	77.6 88.5 85.2	7
-2430-60	1458 2430 2916	74 60 50	1480	398.0 456.2 470.8	560	73.8 87 84.3	6.5
-2232-50	1339 2232 2678	64 50 42	1480	328.1 353.3 369.8	400	71.1 86 82.8	6
-2072-39	1242 2072 2500	52 39 32	1480	281.8 271.6 272.2	315	62.4 81 80	5.7
DH(V)400-2448-67-O	1469 2448 2938	83 67 57	1480	418.0 507.4 522.8	560	79.4 88 87.2	6
-2268-59	1361 2268 2722	73 59.5 49	1480	354.9 422.2 427.7	500	76.2 87 84.9	5.8
-2088-50	1253 2088 2506	64 50 43	1480	297.8 334.4 346.7	400	73.3 85 84.6	5.7
-1944-41	1166 1944 2333	53 41.5 34	1480	253.7 264.6 269.9	315	66.3 83 80	5.6
DH(V)500-3080-75-O	2330 3080 3778	84.5 75 60	1480	624.7 714.6 752.5	800	85.8 88 82	7.5
-2850-72	2250 2850 3420	81.5 72.5 63.5	1480	616.3 646.5 698.0	710	81 87 84.7	7.5
-2640-67	2100 2640 3170	76.5 67 57	1480	539.9 559.9 607.3	630	81 86 81	7.5
-2450-63	1980 2450 2940	70.5 63 54	1480	464.4 494.3 540.2	560	81 85 80	7.5

DH型泵外形及安装尺寸图 (带底座)

Outline & installing Dimensions of Type DH Pumps(With Base Plate)

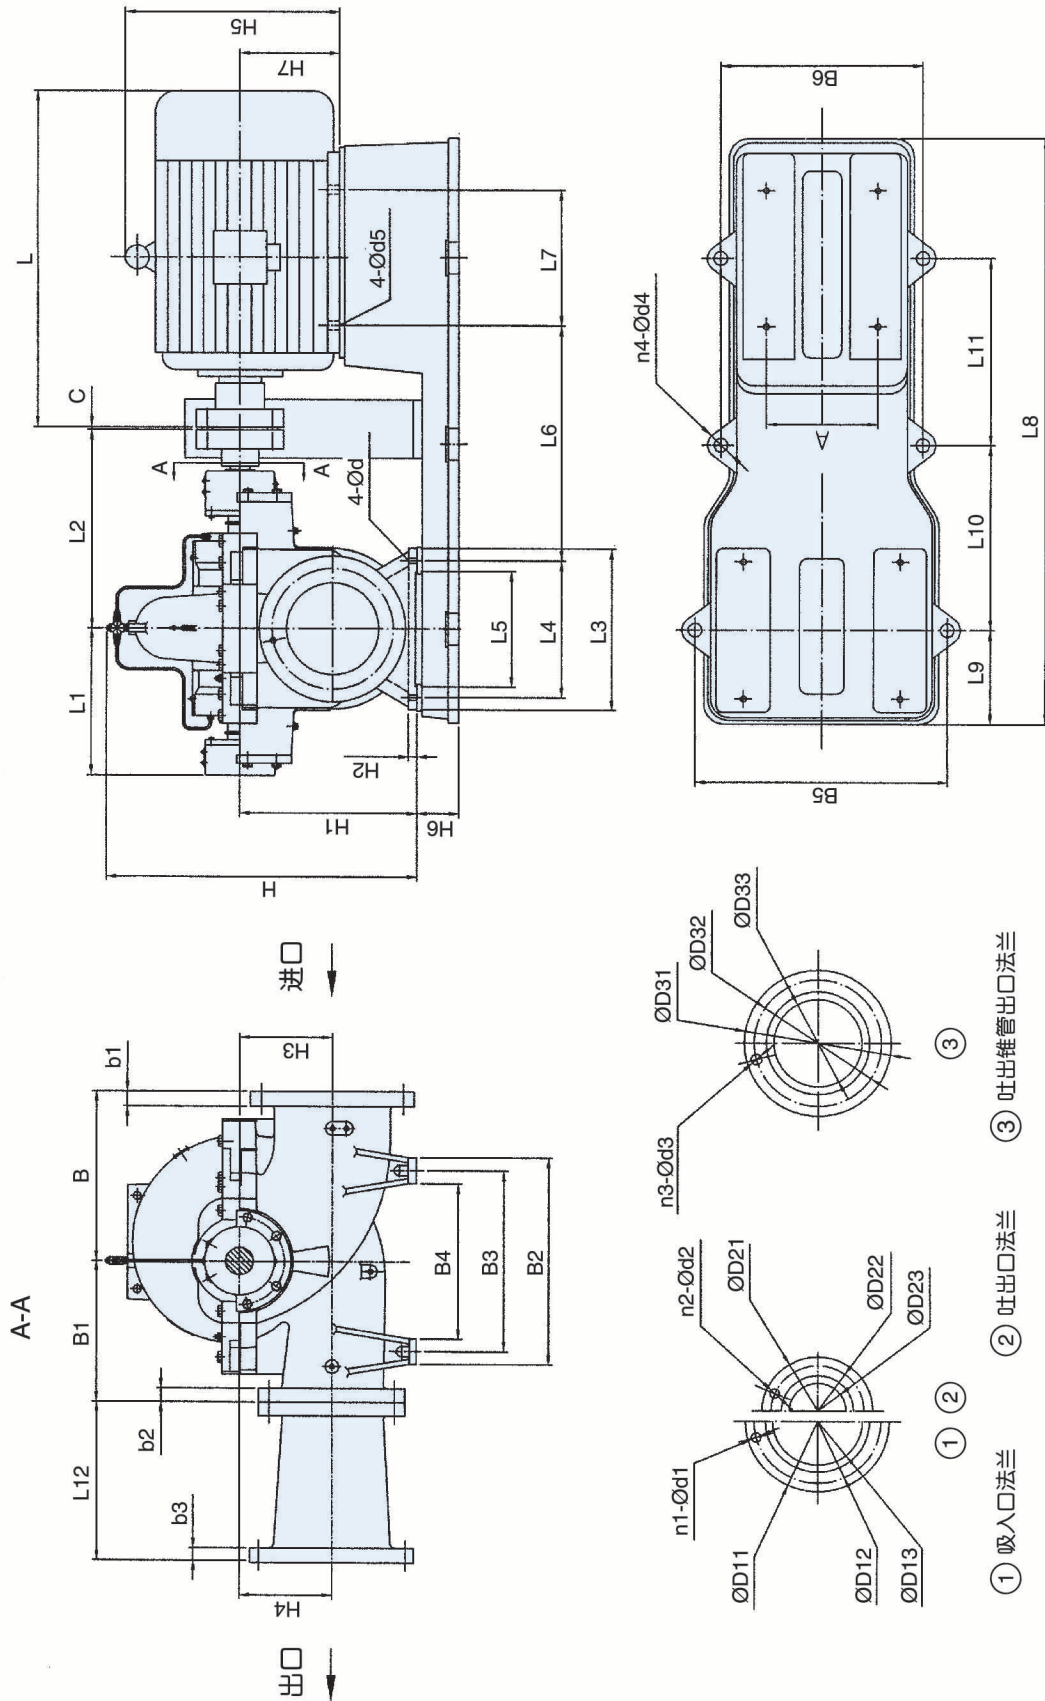

注：如需要DV立式单级双吸泵外形安装尺寸，请来电洽询。



外形及安装尺寸 INSTALLATION DIMENSIONS

(毫米: mm)																																	
泵型号 PUMP TYPE	电机型号 MOTOR TYPE	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C
DH125-164-55-O	Y200L2-2	710	315	415	320	270	210	526	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	3
DH125-151-47	Y200L1-2	710	315	415	320	270	210	526	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	3
DH125-144-39	Y200L1-2	710	315	415	320	270	210	526	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	3
DH125-137-31	Y180M-2	670	315	415	320	270	210	514	241	1222	206	780	-	300	300	410	270	550	550	589	315	32	140	140	430	110	180	279	18.5	25	15	4	3
DH125-134-51-O	Y200L1-2	710	315	415	320	270	210	526	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	3
DH125-133-43	Y200L1-2	710	315	415	320	270	210	526	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	3
DH125-124-36	Y160L-2	645	315	415	320	270	210	501	254	1184	206	780	-	300	300	410	270	550	550	589	315	32	140	140	385	90	160	254	18.5	25	15	4	3
DH125-113-31	Y160M2-2	600	315	415	320	270	210	501	210	1184	206	780	-	300	300	410	270	550	550	589	315	32	140	140	385	90	160	254	18.5	25	15	4	3
DH125-207-90-O	Y280S-2	1000	315	415	320	270	210	614	368	1485	206	933	-	300	300	410	270	550	675	589	315	32	140	140	640	110	280	457	18.5	30	24	4	4
DH125-194-77	Y280S-2	1000	315	415	320	270	210	614	368	1485	206	933	-	300	300	410	270	550	675	589	315	32	140	140	640	110	280	457	18.5	30	24	4	4
DH125-184-63	Y250M-2	925	315	415	320	270	210	592	349	1390	206	875	-	300	300	410	270	550	602	589	315	32	140	140	575	110	250	406	18.5	25	24	4	4
DH125-173-50	Y200L2-2	710	315	415	320	270	210	527	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	4
DH125-171-87-O	Y280S-2	1000	315	415	320	270	210	614	368	1485	206	933	-	300	300	410	270	550	675	589	315	32	140	140	640	110	280	457	18.5	30	24	4	4
DH125-153-71	Y225M-2	810	315	415	320	270	210	543	311	1310	206	826	-	300	300	410	270	550	550	589	315	32	140	140	530	110	225	356	18.5	25	19	4	4
DH125-144-60	Y200L2-2	710	315	415	320	270	210	527	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	4
DH125-137-49	Y200L1-2	710	315	415	320	270	210	527	305	1250	206	780	-	300	300	410	270	550	550	589	315	32	140	140	475	110	200	318	18.5	25	19	4	4
DH150-290-76-O	Y280M-2	1050	315	415	320	270	210	614	419	1485	206	933	-	330	330	470	330	550	675	634	355	32	170	170	640	110	280	457	18.5	30	24	4	4
DH150-280-68	Y280S-2	1000	315	415	320	270	210	614	368	1485	206	933	-	330	330	470	330	550	675	634	355	32	170	170	640	110	280	457	18.5	30	24	4	4
DH150-252-54	Y250M-2	925	315	415	320	270	210	592	349	1390	206	875	-	330	330	470	330	550	602	634	355	32	170	170	575	110	250	406	18.5	25	24	4	4
DH150-242-44	Y225M-2	810	315	415	320	270	210	543	311	1310	206	826	-	330	330	470	330	550	550	634	355	32	170	170	530	110	225	356	18.5	25	19	4	4
DH150-248-68-O	Y280S-2	1000	315	415	320	270	210	614	358	1485	206	933	-	330	330	470	330	550	675	634	355	32	170	170	640	110	280	457	18.5	30	24	4	4
DH150-228-58	Y250M-2	925	315	415	320	270	210	592	349	1390	206	875	-	330	330	470	330	550	602	634	355	32	170	170	575	110	250	406	18.5	25	24	4	4
DH150-216-50	Y225M-2	810	315	415	320	270	210	543	311	1310	206	826	-	330	330	470	330	550	550	634	355	32	170	170	530	110	225	356	18.5	25	19	4	4
DH150-190-44	Y200L2-2	710	315	415	320	270	210	527	305	1250	206	780	-	330	330	470	330	550	550	634	355	32	170	170	475	110	200	318	18.5	25	19	4	4
DH150-360-123-O	Y315L2-2	1295	381	515	320	270	210	740	508	1700	206	1180	-	330	330	470	330	550	725	664	355	36	170	170	770	130	315	508	18.5	30	28	4	4
DH150-335-106	Y315L1-2	1210	381	515	320	270	210	740	508	1700	206	1180	-	330	330	470	330	550	725	664	355	36	170	170	770	130	315	508	18.5	30	28	4	4
DH150-302-90	Y315S-2	1155	381	515	320	270	210	740	457	1700	206	1180	-	330	330	470	330	550	725	664	355	36	170	170	770	130	315	508	18.5	30	28	4	4
DH150-277-74	Y280M-2	1050	381	515	320	270	210	714	419	1585	206	1080	-	330	330	470	330	550	675	664	355	36	170	170	640	110	280	457	18.5	30	24	4	4



外形及安装尺寸 INSTALLATION DIMENSIONS

泵型号 PUMP TYPE		电机型号 MOTOR TYPE		L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C
DH150-283-119-O	Y315M-2	1210	381	515	320	270	210	740	508	1700	206	1180	-	330	330	470	330	550	725	664	355	36	170	170	770	130	315	508	18.5	30	28	4	4		
		1155	381	515	320	270	210	740	457	1700	206	1180	-	330	330	470	330	550	725	664	355	36	170	170	770	130	315	508	18.5	30	28	4	4		
		1050	381	515	320	270	210	714	419	1580	206	1080	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH150-259-103	Y315S-2	1000	381	515	320	270	210	714	368	1585	206	1080	-	330	330	470	330	550	675	664	355	36	170	170	640	110	280	457	18.5	30	24	4	4		
		1210	381	515	390	340	250	705	457	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH150-250-84	Y280M-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH150-234-69	Y280S-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-533-60-O	Y315M-2	1000	381	515	390	340	250	705	457	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1210	381	515	390	340	250	705	457	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-490-52	Y315S-2	1000	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1210	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-450-43	Y280M-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-425-40	Y280S-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-472-60-O	Y315S-2	1000	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1210	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	694	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-436-52	Y280M-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-410-46	Y280S-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-382-43	Y280S-2	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1210	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
		1155	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	694	400	36	200	200	640	130	280	457	24	25	24	4	4		
DH200-490-88	Y315L1-2	1210	381	515	390	340	250	705	508	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1240	381	515	390	340	250	705	457	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-450-75	Y315M-2	1240	381	515	390	340	250	705	457	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1295	381	515	390	340	250	705	508	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-400-61	Y315S-2	1155	381	515	390	340	250	705	406	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1295	381	515	390	340	250	705	508	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1210	381	515	390	340	250	705	508	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
DH200-480-100-O	Y315L2-2	1295	381	515	390	340	250	705	508	1740	240	1100	-	370	370	530	370	720	720	714	400	36	200	200	770	130	315	508	24	30	28	4	4		
		1210</																																	



外形及安装尺寸 INSTALLATION DIMENSIONS

泵型号 PUMP TYPE			电机型号 MOTOR TYPE		(毫米: mm)																											
L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C	
600	315	415	320	270	210	501	210	1184	206	780	-	300	300	410	270	550	550	589	315	32	140	140	140	385	90	160	254	18.5	25	15	4	3
600	315	415	320	270	210	501	210	1184	206	780	-	300	300	410	270	550	550	589	315	32	140	140	140	385	90	160	254	18.5	25	15	4	3
508	315	415	320	270	210	452	178	1050	206	660	-	300	300	410	270	550	400	589	315	32	140	140	140	315	90	132	216	18.5	20	12	4	3
470	315	415	320	270	210	452	140	1050	206	660	-	300	300	410	270	550	400	589	315	32	140	140	140	315	90	132	216	18.5	20	12	4	3
600	315	415	320	270	210	501	210	1184	206	780	-	300	300	410	270	550	550	589	315	32	140	140	140	385	90	160	254	18.5	25	15	4	3
508	315	415	320	270	210	452	178	1050	206	660	-	300	300	410	270	550	400	589	315	32	140	140	140	315	90	132	216	18.5	20	12	4	3
470	315	415	320	270	210	452	140	1050	206	660	-	300	300	410	270	550	400	589	315	32	140	140	140	315	90	132	216	18.5	20	12	4	3
400	315	415	320	270	210	413	140	1050	206	660	-	300	300	410	270	550	400	589	315	32	140	140	140	265	90	112	190	18.5	20	12	4	3
710	315	415	320	270	210	515	279	1222	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	430	110	180	279	18.5	25	15	4	4
645	315	415	320	270	210	502	254	1184	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	385	90	160	254	18.5	25	15	4	4
645	315	415	320	270	210	502	254	1184	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	385	90	160	254	18.5	25	15	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	385	90	160	254	18.5	25	15	4	4
670	315	415	320	270	210	515	241	1222	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	430	110	180	279	18.5	25	15	4	4
645	315	415	320	270	210	502	254	1184	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	385	90	160	254	18.5	25	15	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	410	270	550	550	624	315	32	140	140	140	385	90	160	254	18.5	25	15	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	410	270	550	400	624	315	32	140	140	140	315	90	132	216	18.5	20	12	4	4
645	315	415	320	270	210	502	254	1184	206	780	-	330	330	470	330	550	550	634	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	634	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	634	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	634	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
508	315	415	320	270	210	453	178	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
470	315	415	320	270	210	453	140	1050	206	660	-	330	330	470	330	550	400	634	355	32	170	170	170	315	90	132	216	18.5	20	12	4	4
710	315	415	320	270	210	515	241	1222	206	780	-	330	330	470	330	550	550	664	355	32	170	170	170	430	110	180	279	18.5	25	15	4	4
670	315	415	320	270	210	515	241	1222	206	780	-	330	330	470	330	550	550	664	355	32	170	170	170	430	110	180	279	18.5	25	15	4	4
645	315	415	320	270	210	502	254	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4
600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	170	385	90	160	254	18.5	25	15	4	4



外形及安装尺寸 INSTALLATION DIMENSIONS

泵型号 PUMP TYPE		电机型号 MOTOR TYPE		L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C
DH150-141-29-O	Y160L-4	645	315	415	320	270	210	502	254	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	385	90	160	254	18.5	25	15	4	4		
DH150-134-25	Y160L-4	645	315	415	320	270	210	502	254	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	385	90	160	254	18.5	25	15	4	4		
DH150-125-21	Y160M-4	600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	385	90	160	254	18.5	25	15	4	4		
DH150-118-17	Y160M-4	600	315	415	320	270	210	502	210	1184	206	780	-	330	330	470	330	550	550	664	355	32	170	170	385	90	160	254	18.5	25	15	4	4		
DH150-185-52-O	Y225M-4	840	315	415	320	270	210	573	311	1310	206	826	-	370	370	470	330	550	550	699	355	32	170	170	530	110	225	356	18.5	25	19	4	4		
DH150-167-44	Y225S-4	815	315	415	320	270	210	573	286	1310	206	826	-	370	370	470	330	550	550	699	355	32	170	170	530	110	225	356	18.5	25	19	4	4		
DH150-155-38	Y200L-4	710	315	415	320	270	210	527	305	1250	206	780	-	370	370	470	330	550	550	699	355	32	170	170	475	110	200	318	18.5	25	19	4	4		
DH150-135-30	Y180L-4	710	315	415	320	270	210	515	279	1222	206	780	-	370	370	470	330	550	550	699	355	32	170	170	430	110	180	279	18.5	25	15	4	4		
DH150-162-52-O	Y225M-4	840	315	415	320	270	210	573	311	1310	206	826	-	370	370	470	330	550	550	699	355	32	170	170	530	110	225	356	18.5	25	19	4	4		
DH150-142-44	Y200L-4	710	315	415	320	270	210	527	305	1250	206	780	-	370	370	470	330	550	550	699	355	32	170	170	475	110	200	318	18.5	25	19	4	4		
DH150-131-37	Y200L-4	710	315	415	320	270	210	527	305	1250	206	780	-	370	370	470	330	550	550	699	355	32	170	170	475	110	200	318	18.5	25	19	4	4		
DH150-115-29	Y180M-4	670	315	415	320	270	210	515	241	1222	206	780	-	370	370	470	330	550	550	699	355	32	170	170	430	110	180	279	18.5	25	15	4	4		
DH200-274-15-O	Y180M-4	670	381	515	390	340	250	580	241	1345	240	870	-	370	370	530	370	620	510	694	400	36	200	200	430	110	180	279	24	25	15	4	4		
DH200-241-13	Y160L-4	645	381	515	390	340	250	567	254	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-230-11	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-209-9	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-238-15-O	Y160L-4	645	381	515	390	340	250	567	254	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-212-13	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-205-11	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-195-9	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	694	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-269-27-O	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	370	370	530	370	620	620	714	400	36	200	200	475	110	200	318	24	25	19	4	4		
DH200-243-22	Y180L-4	710	381	515	390	340	250	580	279	1345	240	870	-	370	370	530	370	620	510	714	400	36	200	200	430	110	180	279	24	25	15	4	4		
DH200-223-18	Y180M-4	670	381	515	390	340	250	580	241	1345	240	870	-	370	370	530	370	620	510	714	400	36	200	200	430	110	180	279	24	25	15	4	4		
DH200-202-14	Y160L-4	645	381	515	390	340	250	567	254	1310	240	845	-	370	370	530	370	620	480	714	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-241-25-O	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	370	370	530	370	620	620	714	400	36	200	200	475	110	200	318	24	25	19	4	4		
DH200-218-21	Y180M-4	670	381	515	390	340	250	580	241	1345	240	870	-	370	370	530	370	620	510	714	400	36	200	200	430	110	180	279	24	25	15	4	4		
DH200-196-17	Y160L-4	645	381	515	390	340	250	567	254	1310	240	845	-	370	370	530	370	620	480	714	400	36	200	200	385	110	160	254	24	25	15	4	4		
DH200-173-14	Y160M-4	600	381	515	390	340	250	567	210	1310	240	845	-	370	370	530	370	620	480	714	400	36	200	200	385	110	160	254	24	25	15	4	4		



外形及安装尺寸 INSTALLATION DIMENSIONS

配带底座) With base plate		(毫米: mm)																																
泵型号 PUMP TYPE	电机型号 MOTOR TYPE	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C	
DH200-310-50-O	Y280S-4	1000	381	515	390	340	250	679	368	1640	240	1040	-	370	370	530	370	720	720	720	744	400	36	200	200	640	130	280	457	24	25	24	4	4
DH200-281-42	Y250M-4	925	381	515	390	340	250	657	349	1520	240	1000	-	370	370	530	370	720	720	720	744	400	36	200	200	575	130	250	406	24	25	24	4	4
DH200-256-31	Y225S-4	815	381	515	390	340	250	638	286	1440	240	965	-	370	370	530	370	720	570	744	400	36	200	200	530	110	225	356	24	25	19	4	4	
DH200-230-26	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	370	370	530	370	620	620	744	400	36	200	200	475	110	200	318	24	25	19	4	4	
DH200-277-43-O	Y250M-4	925	381	515	390	340	250	657	349	1520	240	1000	-	370	370	530	370	720	720	744	400	36	200	200	575	130	250	406	24	25	24	4	4	
DH200-252-37	Y225M-4	840	381	515	390	340	250	638	311	1440	240	965	-	370	370	530	370	720	570	744	400	36	200	200	530	110	225	356	24	25	19	4	4	
DH200-227-30	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	370	370	530	370	620	620	744	400	36	200	200	475	110	200	318	24	25	19	4	4	
DH200-198-24	Y180L-4	710	381	515	390	340	250	580	279	1345	240	870	-	370	370	530	370	620	510	744	400	36	200	200	430	110	180	279	24	25	15	4	4	
DH200-328-76-O	Y315S-4	1185	381	515	390	340	250	735	406	1740	240	1100	-	450	450	630	480	720	720	789	400	40	200	200	770	130	315	508	24	30	28	4	4	
DH200-292-66	Y280M-4	1050	381	515	390	340	250	679	419	1640	240	1040	-	450	450	630	480	720	720	789	400	40	200	200	640	130	280	457	24	25	24	4	4	
DH200-256-56	Y280S-4	1000	381	515	390	340	250	679	368	1640	240	1040	-	450	450	630	480	720	720	789	400	40	200	200	640	130	280	457	24	25	24	4	4	
DH200-230-47	Y250M-4	925	381	515	390	340	250	657	349	1520	240	1000	-	450	450	630	480	720	720	789	400	40	200	200	575	130	250	406	24	25	24	4	4	
DH200-293-69-O	Y315S-4	1185	381	515	390	340	250	735	406	1740	240	1100	-	450	450	630	480	720	720	789	400	40	200	200	770	130	315	508	24	25	28	4	4	
DH200-272-60	Y280S-4	1000	381	515	390	340	250	679	368	1640	240	1040	-	450	450	630	480	720	720	789	400	40	200	200	640	130	280	457	24	25	24	4	4	
DH200-227-53	Y250M-4	925	381	515	390	340	250	657	349	1520	240	1000	-	450	450	630	480	720	720	789	400	40	200	200	575	130	250	406	24	25	24	4	4	
DH200-202-45	Y225M-4	840	381	515	390	340	250	638	311	1440	240	965	-	450	450	630	480	720	570	789	400	40	200	200	530	110	225	356	24	25	19	4	4	
DH200-443-21-O	Y225S-4	815	381	515	390	340	250	638	286	1440	240	965	-	400	400	530	370	720	570	729	400	36	200	200	530	110	225	356	24	25	19	4	4	
DH200-403-18	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	400	400	530	370	620	620	729	400	36	200	200	475	110	200	318	24	25	19	4	4	
DH200-378-15	Y180L-4	710	381	515	390	340	250	580	279	1345	240	870	-	400	400	530	370	620	510	729	400	36	200	200	430	110	180	279	24	25	15	4	4	
DH200-349-11	Y180M-4	670	381	515	390	340	250	580	241	1345	240	870	-	400	400	530	370	620	510	729	400	36	200	200	430	110	180	279	24	25	15	4	4	
DH200-396-20-O	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	400	400	530	370	620	620	729	400	36	200	200	475	110	200	318	24	25	19	4	4	
DH200-378-17	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	400	400	530	370	620	620	729	400	36	200	200	475	110	200	318	24	25	19	4	4	
DH200-353-14	Y180L-4	710	381	515	390	340	250	580	279	1345	240	870	-	400	400	530	370	620	510	729	400	36	200	200	430	110	180	279	24	25	15	4	4	
DH200-331-11	Y180M-4	670	381	515	390	340	250	580	241	1345	240	870	-	400	400	530	370	620	510	729	400	36	200	200	430	110	180	279	24	25	15	4	4	
DH200-446-38-O	Y280S-4	1000	381	515	390	340	250	679	368	1640	240	1040	-	400	400	530	370	720	720	759	400	36	200	200	640	130	280	457	24	25	24	4	4	
DH200-403-31	Y250M-4	925	381	515	390	340	250	657	349	1520	240	1000	-	400	400	530	370	720	720	759	400	36	200	200	575	130	250	406	24	25	24	4	4	
DH200-371-25	Y225S-4	815	381	515	390	340	250	638	286	1440	240	965	-	400	400	530	370	720	570	759	400	36	200	200	530	110	225	356	24	25	19	4	4	
DH200-331-20	Y200L-4	710	381	515	390	340	250	592	305	1385	240	915	-	400	400	530	370	620	620	759	400	36	200	200	475	110	200	318	24	25	19	4	4	



外形及安装尺寸 INSTALLATION DIMENSIONS

(配带底座) With base plate		电机型号 MOTOR TYPE		泵型号 PUMP TYPE		(毫米: mm)																										
L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C	
925	381	515	390	340	250	657	349	1520	240	1000	-	400	400	530	370	720	720	759	400	36	200	200	200	575	130	250	406	24	25	24	4	4
840	381	515	390	340	250	638	311	1440	240	965	-	400	400	530	370	720	570	759	400	36	200	200	530	110	225	356	24	25	19	4	4	4
815	381	515	390	340	250	638	286	1440	240	965	-	400	400	530	370	720	570	759	400	36	200	200	530	110	225	356	24	25	19	4	4	4
710	381	515	390	340	250	592	305	1385	240	915	-	400	400	530	370	620	620	759	400	36	200	200	475	110	200	318	24	25	19	4	4	4
1240	433	590	480	430	300	766	457	1920	305	1200	-	450	450	630	490	790	790	885	500	40	200	200	770	140	315	508	24	30	28	4	5	5
1185	433	590	480	430	300	766	406	1920	305	1200	-	450	450	630	490	790	790	885	500	40	200	200	770	140	315	508	24	30	28	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	450	450	630	490	790	790	885	500	40	200	200	640	130	280	457	24	30	24	4	5	5
925	433	590	480	430	300	688	349	1680	305	1080	-	450	450	630	490	790	690	885	500	40	200	200	575	130	250	406	24	30	24	4	5	5
1185	433	590	480	430	300	766	406	1920	305	1200	-	450	450	630	490	790	790	885	500	40	200	200	770	140	315	508	24	30	28	4	5	5
1050	433	590	480	430	300	710	419	1780	305	1170	-	450	450	630	490	790	790	885	500	40	200	200	640	130	280	457	24	30	24	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	450	450	630	490	790	790	885	500	40	200	200	640	130	280	457	24	30	24	4	5	5
840	433	590	480	430	300	669	311	1680	305	1080	-	450	450	630	490	790	690	885	500	40	200	200	530	130	225	356	24	30	19	4	5	5
1325	433	590	480	430	300	766	508	1920	305	1200	-	600	500	770	630	940	790	955	500	42	300	300	770	140	315	508	24	30	28	4	5	5
1240	433	590	480	430	300	766	457	1920	305	1200	-	600	500	770	630	940	790	955	500	42	300	300	770	140	315	508	24	30	28	4	5	5
1325	433	590	480	430	300	766	508	1920	305	1200	-	600	500	770	630	940	790	955	500	42	300	300	770	140	315	508	24	30	28	4	5	5
1240	433	590	480	430	300	766	508	1920	305	1200	-	600	500	770	630	940	790	955	500	42	300	300	770	140	315	508	24	30	28	4	5	5
1185	433	590	480	430	300	766	406	1920	305	1200	-	600	500	770	630	940	790	955	500	42	300	300	770	140	315	508	24	30	28	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	450	450	630	490	790	790	870	500	42	240	240	640	130	280	457	24	30	24	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	450	450	630	490	790	790	870	500	42	240	240	640	130	280	457	24	30	24	4	5	5
925	433	590	480	430	300	688	349	1680	305	1080	-	450	450	630	490	790	690	870	500	42	240	240	575	130	250	406	24	30	24	4	5	5
815	433	590	480	430	300	669	286	1680	305	1080	-	450	450	630	490	790	690	870	500	42	240	240	530	130	225	356	24	30	19	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	450	450	630	490	790	790	870	500	42	240	240	640	130	280	457	24	30	24	4	5	5
925	433	590	480	430	300	688	349	1680	305	1080	-	450	450	630	490	790	690	870	500	42	240	240	575	130	250	406	24	30	24	4	5	5
840	433	590	480	430	300	669	311	1680	305	1080	-	450	450	630	490	790	690	870	500	42	240	240	530	130	225	356	24	30	19	4	5	5
815	433	590	480	430	300	669	286	1680	305	1080	-	450	450	630	490	790	690	870	500	42	240	240	530	130	225	356	24	30	19	4	5	5
1240	433	590	480	430	300	766	508	1920	305	1200	-	500	500	630	490	790	790	895	500	42	240	240	770	140	315	508	24	30	28	4	5	5
1185	433	590	480	430	300	766	406	1920	305	1200	-	500	500	630	490	790	790	895	500	42	240	240	770	140	315	508	24	30	28	4	5	5
1050	433	590	480	430	300	710	419	1780	305	1170	-	500	500	630	490	790	790	895	500	42	240	240	640	130	280	457	24	30	24	4	5	5
1000	433	590	480	430	300	710	368	1780	305	1170	-	500	500	630	490	790	790	895	500	42	240	240	640	130	280	457	24	30	24	4	5	5



外形及安装尺寸 INSTALLATION DIMENSIONS

配带底座) With base plate		(毫米: mm)																																
泵型号 PUMP TYPE	电机型号 MOTOR TYPE	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C	
DH250-650-48-O	Y315M-4	1240	433	590	480	430	300	766	457	1920	305	1200	-	500	500	630	490	790	790	895	500	42	240	240	240	770	140	315	508	24	30	28	4	5
DH250-585-40	Y280M-4	1050	433	590	480	430	300	710	419	1780	305	1170	-	500	500	630	490	790	790	895	500	42	240	240	240	640	130	280	457	24	30	24	4	5
DH250-530-34	Y280S-4	1000	433	590	480	430	300	710	368	1780	305	1170	-	500	500	630	490	790	790	895	500	42	240	240	240	640	130	280	457	24	30	24	4	5
DH250-470-28	Y250M-4	925	433	590	480	430	300	688	349	1680	305	1080	-	500	500	630	490	790	690	895	500	42	240	240	240	575	130	250	406	24	30	24	4	5
DH250-706-62	Y315L2-4	1325	511	695	480	400	320	887	508	2060	295	670	670	600	500	800	600	980	850	1048	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH250-648-47	Y315M-4	1240	511	695	480	400	320	887	457	2060	295	670	670	600	500	800	600	980	850	1048	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH250-695-68	Y315L2-4	1325	511	695	480	400	320	887	508	2060	295	670	670	600	500	800	600	980	850	1048	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH250-655-55	Y315L1-4	1240	511	695	480	400	320	887	508	2060	295	670	670	600	500	800	600	980	850	1048	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH250-598-43	Y315S-4	1185	511	695	480	400	320	887	406	2060	295	670	670	600	600	800	600	980	850	1048	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-1051-39-O	Y315L1-4	1240	511	695	480	400	320	887	508	2060	295	670	670	500	500	800	600	980	850	1020	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-994-33	Y315M-4	1240	511	695	480	400	320	887	457	2060	295	670	670	500	500	800	600	980	850	1020	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-943-27	Y280M-4	1050	511	695	480	400	320	831	419	1900	295	620	620	500	500	800	600	980	770	1020	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH300-871-20	Y280S-4	1000	511	695	480	400	320	831	368	1900	295	620	620	500	500	800	600	980	770	1020	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH300-1030-37-O	Y315M-4	1240	511	695	480	400	320	887	457	2060	295	670	670	500	500	800	600	980	850	1020	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-968-32	Y315S-4	1185	511	695	480	400	320	887	406	2060	295	670	670	500	500	800	600	980	850	1020	600	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-914-27	Y280M-4	1050	511	695	480	400	320	831	419	1900	295	620	620	500	500	800	600	980	770	1020	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH300-850-22	Y280S-4	1000	511	695	480	400	320	831	368	1900	295	620	620	500	500	800	600	980	770	1020	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH300-1001-45	Y315L2-4	1325	556	754	612	520	440	885	508	2180	355	700	700	550	550	800	600	980	850	1152	670	45	300	300	300	770	140	315	508	24	30	28	6	6
DH300-929-37	Y315M-4	1240	556	754	612	520	440	885	457	2180	355	700	700	550	550	800	600	980	850	1152	670	45	300	300	300	770	140	315	508	24	30	28	6	5
DH300-976-47	Y315L2-4	1325	556	754	612	520	440	885	508	2180	355	700	700	550	550	800	600	980	850	1152	670	45	300	300	300	770	140	315	508	24	30	28	6	5
DH300-886-40	Y315M-4	1240	556	754	612	520	440	885	457	2180	355	700	700	550	550	800	600	980	850	1152	670	45	300	300	300	770	140	315	508	24	30	28	6	5
DH300-803-34	Y315S-4	1185	556	754	612	520	440	885	406	2180	355	700	700	550	550	800	600	980	850	1152	670	45	300	300	300	770	140	315	508	24	30	28	6	5
DH350-1098-24-O	Y315S-4	1185	511	695	520	400	320	887	406	2060	295	670	670	550	500	800	600	980	850	1050	600	45	300	300	300	770	140	315	508	24	30	28	6	5
DH350-1044-20	Y280S-4	1000	511	695	520	400	320	831	368	1900	295	620	620	550	500	800	600	980	770	1050	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH350-1008-15	Y280S-4	1000	511	695	520	400	320	831	368	1900	295	620	620	550	500	800	600	980	770	1050	600	45	300	300	300	640	140	280	457	24	30	24	6	6
DH350-965-11	Y250M-4	925	511	695	520	400	320	809	349	1790	295	1184	-	550	500	800	600	980	720	1050	600	45	300	300	300	575	140	280	406	24	30	24	4	6




外形及安装尺寸 INSTALLATION DIMENSIONS

配带底座) With base plate		(毫米: mm)																															
泵型号 PUMP TYPE	电机型号 MOTOR TYPE	L	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	B	B1	B2	B4	B5	B6	H	H1	H2	H3	H4	H5	H6	H7	A	d	d4	d5	n4	C
DH350-936-23-O	Y280M-4	1050	511	695	520	400	320	831	419	1900	295	620	620	550	500	800	600	980	770	1050	600	45	300	300	640	140	280	457	24	30	24	6	6
DH350-864-20	Y280S-4	1000	511	695	520	400	320	831	368	1900	295	620	620	550	500	800	600	980	770	1050	600	45	300	300	640	140	280	457	24	30	24	6	6
DH350-799-17	Y250M-4	925	511	695	520	400	320	809	349	1790	295	1184	-	550	500	800	600	980	720	1050	600	45	300	300	575	140	250	406	24	25	24	4	6
DH350-700-14	Y225M-4	840	511	695	520	400	320	790	311	1720	295	1145	-	550	500	800	600	980	670	1050	600	45	300	300	530	130	225	356	24	25	19	4	6
DH400-1476-36	Y315L2-4	1325	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1120	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1361-27	Y315L1-4	1240	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1120	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1442-37	Y315L2-4	1325	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1120	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1332-30	Y315L1-4	1240	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1120	670	48	350	350	770	140	315	508	24	30	28	6	5
DH400-1732-32-O	Y315L2-4	1325	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	5
DH400-1692-26	Y315L1-4	1240	556	754	612	520	440	886	508	2180	355	700	700	650	550	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	5
DH400-1642-21	Y315M-4	1240	556	754	612	520	440	886	457	2180	355	700	700	650	550	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	5
DH400-1420-19	Y315S-4	1185	556	754	612	520	440	886	406	2180	355	700	700	650	550	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	5
DH400-1422-31-O	Y315L1-4	1240	556	754	612	520	440	886	508	2180	355	700	700	650	500	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1336-26	Y315M-4	1240	556	754	612	520	440	886	457	2180	355	700	700	650	500	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1271-22	Y315S-4	1185	556	754	612	520	440	886	406	2180	355	700	700	650	500	800	600	980	850	1175	670	48	350	350	770	140	315	508	24	30	28	6	6
DH400-1188-18	Y280M-4	1050	556	754	612	520	440	830	419	2020	355	650	650	500	500	800	600	980	770	1175	670	48	350	350	640	140	280	457	24	30	24	6	6

DH型泵外形及安装尺寸图 (不带底座)

Outline & installing Dimensions of Type DH Pumps (Without Base Plate)

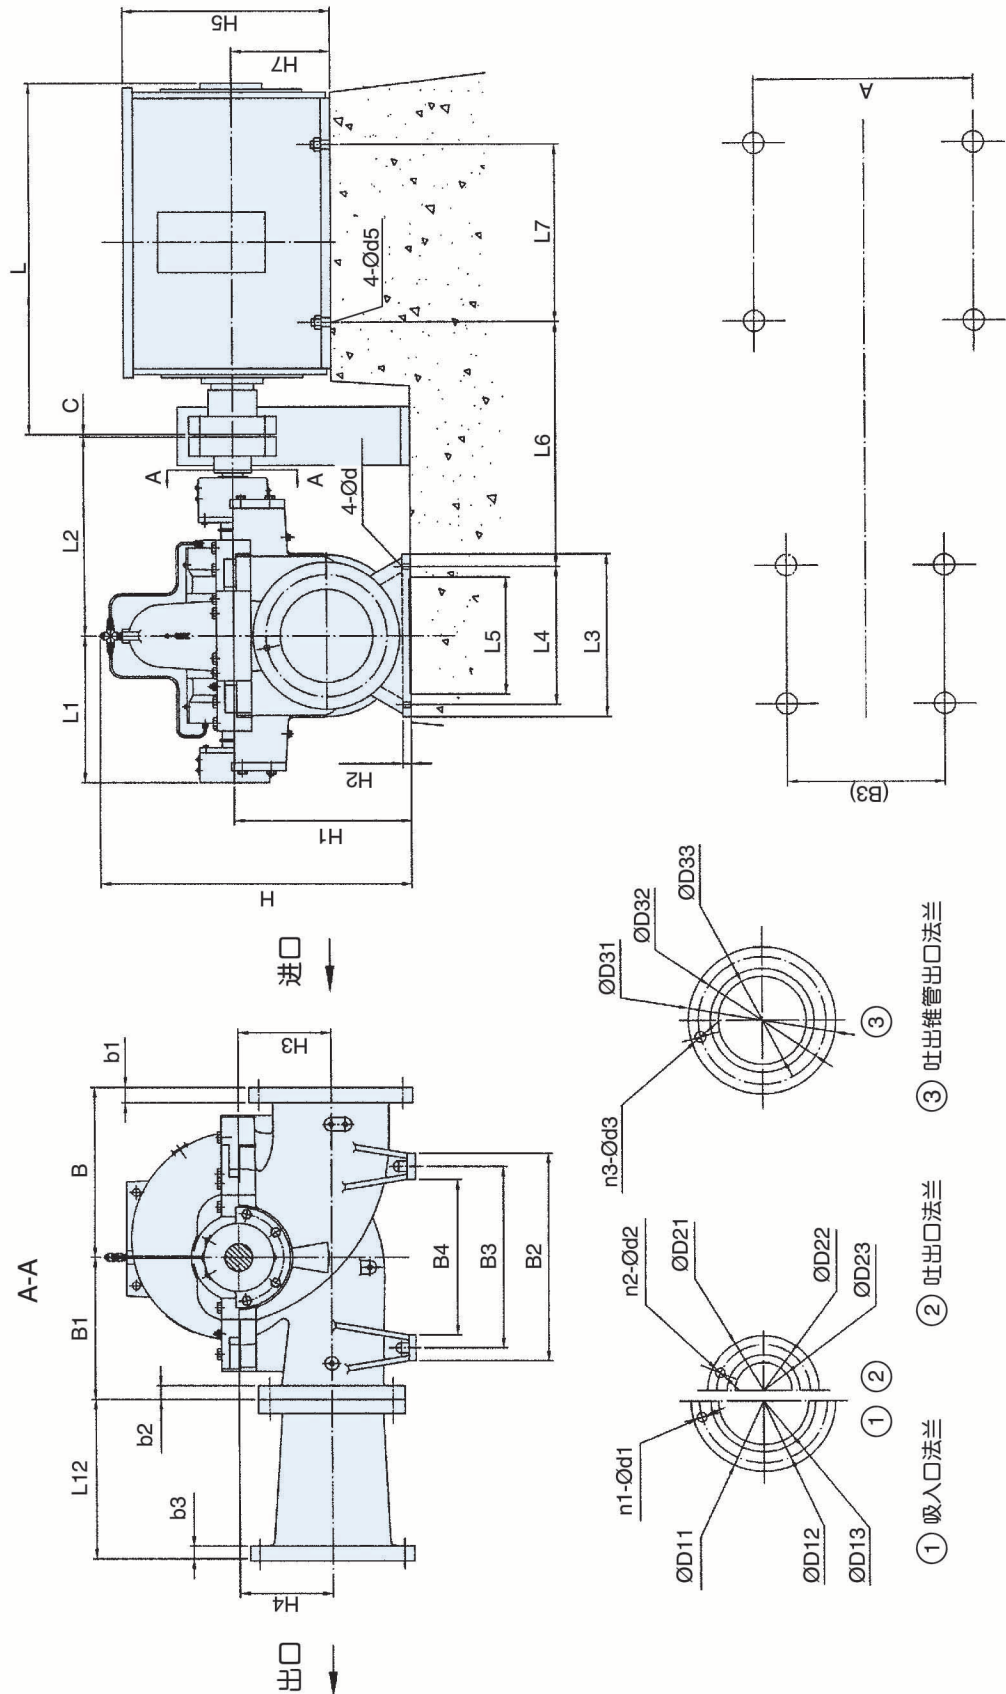

注: 如需要DV立式单级双吸泵外形安装尺寸, 请来电洽询。



外形及安装尺寸 INSTALLATION DIMENSIONS

泵型号 PUMP TYPE		电机型号 MOTOR TYPE		(毫米: mm)																			
L	L1	L2	L3	L4	L5	L6	L7	B	B1	B2	B3	B4	H	H1	H2	H3	H4	H5	H7	A	d	d5	C
DH200-540-108-O	1540	381	515	390	340	250	743	560	370	530	450	370	714	400	36	200	200	848	355	610	24	28	4
DH200-583-105-O	1570	433	590	480	430	300	804	630	600	770	700	630	955	500	42	300	300	848	355	610	24	28	5
DH200-550-88	1570	433	590	480	430	300	804	560	600	770	700	630	955	500	42	300	300	848	355	610	24	28	5
DH200-536-90-O	1570	433	590	480	430	300	804	560	600	770	700	630	955	500	42	300	300	848	355	610	24	28	5
DH250-817-91-O	1570	511	695	480	400	320	925	630	600	800	700	600	1048	600	45	300	300	848	355	610	24	28	6
DH250-756-76	1570	511	695	480	400	320	925	560	600	800	700	600	1048	600	45	300	300	848	355	610	24	28	6
DH250-734-82-O	1570	511	695	480	400	320	925	560	600	800	700	600	1048	600	45	300	300	848	355	610	24	28	6
DH250-792-150-O	1980	511	695	480	400	320	1045	1000	650	800	700	600	1155	600	32	350	350	1330	400	710	24	35	5
DH250-800-125	1980	511	695	480	400	320	1045	1000	650	800	700	600	1155	600	32	350	350	1330	400	710	24	35	5
DH250-731-104	1570	511	695	480	400	320	924	630	650	800	700	600	1155	600	32	350	350	848	355	610	24	28	5
DH250-653-88	1570	511	695	480	400	320	924	630	650	800	700	600	1155	600	32	350	350	848	355	610	24	28	5
DH250-731-132-O	1980	511	695	480	400	320	1045	1000	650	800	700	600	1155	600	32	350	350	1330	400	710	24	35	5
DH250-718-112	1980	511	695	480	400	320	1045	1000	650	800	700	600	1155	600	32	350	350	1330	400	710	24	35	5
DH250-591-99	1570	511	695	480	400	320	924	630	650	800	700	600	1155	600	32	350	350	848	355	610	24	28	5
DH250-569-83	1570	511	695	480	400	320	924	560	650	800	700	600	1155	600	32	350	350	848	355	610	24	28	5
DH300-1174-66-O	1570	556	754	612	520	440	923	630	550	800	700	600	1152	670	45	300	300	848	355	610	24	28	5
DH300-1080-55	1570	556	754	612	520	440	923	560	550	800	700	600	1152	670	45	300	300	848	355	610	24	28	5
DH300-1080-54-O	1570	556	754	612	520	440	923	560	550	800	700	600	1152	670	45	300	300	848	355	610	24	28	5
DH300-1242-116-O	1980	556	754	612	520	440	1045	1000	650	800	700	600	1145	670	32	350	350	1330	400	710	24	35	6
DH300-1166-100	1980	556	754	612	520	440	1045	1000	650	800	700	600	1145	670	32	350	350	1330	400	710	24	35	6
DH300-1084-83	1980	556	754	612	520	440	1045	1000	650	800	700	600	1145	670	32	350	350	1330	400	710	24	35	6
DH300-1001-66	1570	556	754	612	520	440	924	560	650	800	700	600	1145	670	32	350	350	848	355	610	24	28	6
DH300-1044-104-O	1980	556	754	612	520	440	1045	1000	650	800	700	600	1145	670	32	350	350	1330	400	710	24	35	6
DH300-965-90	1980	556	754	612	520	440	1045	1000	650	800	700	600	1145	670	32	350	350	1330	400	710	24	35	6
DH300-875-74	1570	556	754	612	520	440	924	560	650	800	700	600	1145	670	32	350	350	848	355	610	24	28	6
DH300-799-62	1325	556	754	612	520	440	886	508	650	800	700	600	1145	670	32	350	350	770	315	508	24	28	6
DH400-1678-53-O	1570	556	754	612	520	440	924	630	650	800	700	600	1120	670	48	350	350	848	355	610	24	28	6
DH400-1577-45	1570	556	754	612	520	440	924	560	650	800	700	600	1120	670	48	350	350	848	355	610	24	28	6
DH400-1620-51-O	1570	556	754	612	520	440	924	630	650	800	700	600	1120	670	48	350	350	848	355	610	24	28	6
DH400-1519-45	1570	556	754	612	520	440	924	560	650	800	700	600	1120	670	48	350	350	848	355	610	24	28	6
DH400-1750-94-O	2180	622	860	610	520	450	1172	1120	700	1050	950	850	1285	750	50	350	350	1475	450	800	24	35	7
DH400-1650-76	1980	622	860	610	520	450	1152	1000	700	1050	950	850	1285	750	50	350	350	1330	400	710	24	35	7



外形及安装尺寸 INSTALLATION DIMENSIONS

泵型号 PUMP TYPE		电机型号 MOTOR TYPE		(毫米: mm)																				
L	L1	L2	L3	L4	L5	L6	L7	B	B1	B2	B3	B4	H	H1	H2	H3	H4	H5	H7	A	d	d5	C	
DH400-1570-62	1980	622	860	610	520	450	1152	1000	700	650	1050	950	850	1285	750	50	350	350	1330	400	710	24	35	7
DH400-1510-50	1570	622	860	610	520	450	1031	630	700	650	1050	950	850	1285	750	50	350	350	848	355	610	24	28	7
DH400-1550-80-O	1980	622	860	610	520	450	1152	1000	700	650	1050	950	850	1285	750	50	350	350	1330	400	710	24	35	7
DH400-1450-67	1980	622	860	610	520	450	1152	1000	700	650	1050	950	850	1285	750	50	350	350	1330	400	710	24	35	7
DH400-1360-57	1570	622	860	610	520	450	1031	630	700	650	1050	950	850	1285	750	50	350	350	848	355	610	24	28	7
DH400-1280-47	1570	622	860	610	520	450	1031	560	700	650	1050	950	850	1285	750	50	350	350	848	355	610	24	28	7
DH400-1836-160-O	2550	622	860	720	520	420	1332	1250	750	650	1050	950	850	1290	750	40	400	400	1655	500	900	24	42	7
DH400-1735-136	2550	622	860	720	520	420	1332	1250	750	650	1050	950	850	1290	750	40	400	400	1655	500	900	24	42	7
DH400-1624-112	2180	622	860	720	520	420	1172	1120	750	650	1050	950	850	1290	750	40	400	400	1475	450	800	24	35	7
DH400-1537-91	1980	622	860	720	520	420	1152	1000	750	650	1050	950	850	1290	750	40	400	400	1330	400	710	24	35	7
DH400-1688-139-O	2550	622	860	720	520	420	1332	1250	750	650	1050	950	850	1290	750	40	400	400	1655	500	900	24	42	7
DH400-1573-119	2180	622	860	720	520	420	1172	1120	750	650	1050	950	850	1290	750	40	400	400	1475	450	800	24	35	7
DH400-1451-99	2180	622	860	720	520	420	1172	1120	750	650	1050	950	850	1290	750	40	400	400	1475	450	800	24	35	7
DH400-1343-81	1980	622	860	720	520	420	1152	1000	750	650	1050	950	850	1290	750	40	400	400	1330	400	710	24	35	7
DH450-2743-43-O	1980	622	860	612	520	450	1152	1000	750	650	1050	950	850	1295	750	55	400	400	1330	400	710	24	35	7
DH450-2635-35	1980	622	860	612	520	450	1152	1000	750	650	1050	950	850	1295	750	55	400	400	1330	400	710	24	35	7
DH450-2563-27	1570	622	860	612	520	450	1031	630	750	650	1050	950	850	1295	750	55	400	400	848	355	610	24	28	7
DH450-2484-21	1570	622	860	612	520	450	1031	560	750	650	1050	950	850	1295	750	55	400	400	848	355	610	24	28	7
DH450-2232-42-O	1980	622	860	612	520	450	1152	1000	750	650	1050	950	850	1295	750	55	400	400	1330	400	710	24	35	7
DH450-2088-36	1570	622	860	612	520	450	1031	630	750	650	1050	950	850	1295	750	55	400	400	848	355	610	24	28	7
DH450-1987-30	1570	622	860	612	520	450	1031	560	750	650	1050	950	850	1295	750	55	400	400	848	355	610	24	28	7
DH450-1858-25	1325	622	860	612	520	450	993	508	750	650	1050	950	850	1295	750	55	400	400	770	315	508	24	28	7
DH400-2610-70-O	2180	622	860	720	520	420	1172	1120	700	650	1050	950	850	1290	750	50	400	400	1475	450	800	24	35	7
DH400-2430-60	1980	622	860	720	520	420	1152	1000	700	650	1050	950	850	1290	750	50	400	400	1330	400	710	24	35	7
DH400-2232-50	1980	622	860	720	520	420	1152	1000	700	650	1050	950	850	1290	750	50	400	400	1330	400	710	24	35	7
DH400-2072-39	1570	622	860	720	520	420	1031	630	700	650	1050	950	850	1290	750	50	400	400	848	355	610	24	28	7
DH400-2448-67-O	1980	622	860	720	520	420	1152	1000	700	650	1050	950	850	1290	750	50	400	400	1330	400	710	24	35	7
DH400-2268-59	1980	622	860	720	520	420	1152	1000	700	650	1050	950	850	1290	750	50	400	400	1330	400	710	24	35	7
DH400-2088-50	1980	622	860	720	520	420	1152	1000	700	650	1050	950	850	1290	750	50	400	400	1330	400	710	24	35	7
DH400-1944-41	1570	622	860	720	520	420	1031	630	700	650	1050	950	850	1290	750	50	400	400	848	355	610	24	28	7
DH500-3080-75-O	2180	622	860	720	580	420	1172	1120	720	630	1020	800	580	1300	800	55	415	415	1475	450	800	41	35	7
DH500-2850-72	2180	622	860	720	580	420	1172	1120	720	630	1020	800	580	1300	800	55	415	415	1475	450	800	41	35	7
DH500-2640-67	2180	622	860	720	580	420	1172	1120	720	630	1020	800	580	1300	800	55	415	415	1475	450	800	41	35	7
DH500-2450-63	1980	622	860	720	580	420	1152	1000	720	630	1020	800	580	1300	800	55	415	415	1330	400	710	41	35	7



吸入吐出口法兰及吐出锥管尺寸表

SUCTION AND DISCHARGE NOZZLE FLANGE DISCHARGE CONIC PIPE DIMENSIONS

泵型号 PUMP TYPE	(毫米: mm)																		
	b1	D11	D12	D13	n1	d1	b2	D21	D22	D23	n2	d2	b3	D31	D32	D33	n3	d3	L12
DH125-164-55-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-134-51-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-207-90-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-171-82-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH150-290-75-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-248-68-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-360-123-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-283-119-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH200-533-59-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-472-61-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-540-108-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-480-100-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH125-83-14-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-65-13-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-104-22-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-85-21-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-116-39-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH125-99-35-O	26	270	210	125	8	17.5	22	195	160	80	8	17.5	26	270	210	125	8	17.5	300
DH150-145-19-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-124-17-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-185-31-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-141-29-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH150-185-52-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300

注: 叶轮经过切割后的机型尺寸同原型。



吸入吐出口法兰及吐出锥管尺寸表

SUCTION AND DISCHARGE NOZZLE FLANGE DISCHARGE CONIC PIPE DIMENSIONS

泵型号 PUMP TYPE	b1	D11	D12	D13	n1	d1	b2	D21	D22	D23	n2	d2	b3	D31	D32	D33	n3	d3	L12
DH150-162-51-O	26	300	240	150	8	22	24	230	180	100	8	17.5	26	300	240	150	8	22	300
DH200-274-14-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-238-15-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-269-27-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-241-25-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-310-47-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-277-43-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-328-76-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-293-69-O	30	365	295	200	12	22	26	270	210	125	8	17.5	30	360	295	200	12	22	350
DH200-443-21-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-396-20-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-446-38-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-447-35-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-515-66-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-439-60-O	30	365	295	200	12	22	26	300	240	150	8	22	34	360	295	200	12	22	300
DH200-583-105-O	30	365	310	200	12	26	26	300	250	150	8	26	34	360	295	200	12	22	300
DH200-536-90-O	30	365	310	200	12	26	26	300	250	150	8	26	34	360	295	200	12	22	300
DH250-695-30-O	32	425	355	250	12	26	30	365	295	200	12	22	36	425	355	250	12	26	300
DH250-640-28-O	32	425	355	250	12	26	30	365	295	200	12	22	36	425	355	250	12	26	300
DH250-710-52-O	32	425	355	250	12	26	30	365	295	200	12	22	36	425	355	250	12	26	300
DH250-650-48-O	32	425	355	250	12	26	30	365	295	200	12	22	36	425	355	250	12	26	300
DH250-817-91-O	32	425	355	250	12	26	30	360	295	200	12	22	36	425	355	250	12	26	300
DH250-734-82-O	32	425	355	250	12	26	30	360	295	200	12	22	36	425	355	250	12	26	300

注：叶轮经过切割后的机型尺寸同原型。



吸入吐出口法兰及吐出锥管尺寸表

SUCTION AND DISCHARGE NOZZLE FLANGE DISCHARGE CONIC PIPE DIMENSIONS

泵型号 PUMP TYPE	b1	D11	D12	D13	n1	d1	b2	D21	D22	D23	n2	d2	b3	D31	D32	D33	n3	d3	L12
DH250-792-150-O	47	425	370	250	12	30	41	360	310	200	12	26	36	425	355	250	12	26	300
DH250-731-132-O	47	425	370	250	12	30	41	360	310	200	12	26	36	425	355	250	12	26	300
DH300-1051-39-O	32	485	410	300	12	26	32	425	355	250	12	26	34	485	410	300	12	26	300
DH300-1030-37-O	32	485	410	300	12	26	32	425	355	250	12	26	34	485	410	300	12	26	300
DH300-1174-66-O	32	485	410	300	12	26	32	425	355	250	12	26	34	485	410	300	12	26	300
DH300-1080-54-O	32	485	410	300	12	26	32	425	355	250	12	26	34	485	410	300	12	26	300
DH300-1242-116-O	51	485	430	300	16	30	48	425	370	250	12	30	34	485	410	300	12	26	300
DH300-1044-104-O	51	485	430	300	16	30	48	425	370	250	12	30	34	485	410	300	12	26	300
DH350-1098-24-O	36	555	470	350	16	26	32	485	410	300	12	26	38	555	470	350	16	26	300
DH350-936-23-O	36	555	470	350	16	26	32	485	410	300	12	26	38	555	470	350	16	26	300
DH400-1678-53-O	38	620	525	400	16	30	32	485	410	300	12	26	48	620	525	400	16	30	450
DH400-1620-51-O	38	620	525	400	16	30	32	485	410	300	12	26	48	620	525	400	16	30	450
DH400-1750-94-O	38	620	525	400	16	30	32	485	410	300	12	26	48	620	525	400	16	30	450
DH400-1550-80-O	38	620	525	400	16	30	32	485	410	300	12	26	48	620	525	400	16	30	450
DH400-1836-160-O	58	620	550	400	16	36	50	485	430	300	16	30	48	620	525	400	16	30	450
DH400-1688-139-O	58	620	550	400	16	36	50	485	430	300	16	30	48	620	525	400	16	30	450
DH400-1732-32-O	38	620	525	400	16	30	36	555	470	350	16	26	40	620	525	400	16	30	300
DH400-1422-31-O	38	620	525	400	16	30	36	555	470	350	16	26	40	620	525	400	16	30	300
DH400-2743-43-O	38	640	585	450	20	31	38	580	525	400	16	31	42	670	585	450	20	30	450
DH400-2232-42-O	38	640	585	450	20	31	38	580	525	400	16	31	42	670	585	450	20	30	450
DH400-2610-70-O	38	620	525	400	16	30	36	555	470	350	16	26	40	620	525	400	16	30	300
DH400-2448-67-O	38	620	525	400	16	30	36	555	470	350	16	26	40	620	525	400	16	30	300
DH500-3080-75-O	42	715	650	500	20	34	36	520	470	350	16	28	40	620	525	400	16	30	300

注：叶轮经过切割后的机型尺寸同原型。

